



PRODUCTS 2025

LOBA – Your partner for surface finishing and care

New products in 2025

NEW



Speed

QUICK & EASY – WITH ONLY 2 LAYERS OF APPLICATION.

1K water-based finish for wooden floors. Ideal for time-critical construction sites.

Thanks to the two-coat system without primer and fast drying time, LOBA Speed can usually be applied within one day. In addition, the water-based finish is very low-emission, highly resistant to plasticizers from hard-wood flooring adhesive, and intensifies the wood's natural color. Just meet deadlines – with the new Speed! [See page 21](#)



Permanent OilCare

WOOD AND CORK FLOORS: LONG-LASTING CARE AND PROTECTION!

Film-forming care oil for all oiled surfaces.

The simple solution for oiled floors with superficial signs of wear: Permanent OilCare forms a thin coat that ensures an even surface with long-lasting protection and extends the renovation cycle. Ideal for hard wax and UV oil surfaces and for coating impregnated oiled surfaces. [See page 55](#)



EasyFinish Neo

HIGH PERFORMANCE. SUSTAINABLE. EASY.

1K finish for wooden floors with 2K performance.

Based on renewable raw materials.

Experience the revolution! Just as durable and reliable as EasyFinish, healthy to live in and environmentally friendly for a sustainable future. Innovative formula based on renewable raw materials, low-emission and CO₂-reduction compared to the industry average.

Go easy, get Neo! [See page 19](#)



InvisibleCare

SEMI-GLOSS, EXTRA- MATTE, INVISIBLE!

Water-based care for a satin and extra-matte look.

Do you want to maintain the extra-matte or “Invisible” look of your finished wood floor or elastic floor covering? Or change the gloss level from semi-gloss to extra-matte? It's easy – with InvisibleCare. [See page 52](#)

Contents

HARDWOOD FLOORS

| | |
|---|-------|
| Joint Fillers | 10-11 |
| Primers & Stain | 12-15 |
| List of Wood Species for Primers & Finish Systems | 16 |
| Application Tools for Primers & Finish Systems | 17 |
| 1K Finishes | 18-21 |
| 2K Finishes | 22-23 |
| Additives | 24-25 |
| UV Finish | 26 |
| Special Products | 27 |
| High Solid Oils | 28-32 |
| Hard Wax Oils | 33-35 |
| List of Wood Species for Oil & Wax Systems | 36 |
| Application Tools for Oil & Wax Systems | 37 |

SPORTS FLOORING

| | |
|-----------------|-------|
| Finishes | 38-39 |
| Cleaning & Care | 40-41 |

RESILIENT FLOORING

| | |
|--------|-------|
| Finish | 42-43 |
|--------|-------|

TROWELLED FLOORING

| | |
|-----------------|-------|
| Primer & Finish | 44-45 |
|-----------------|-------|

OUTDOORS

| | |
|------------------------|-------|
| Preparation & Finishes | 46-47 |
| Oils | 48 |
| Cleaning & Care | 49 |

CLEANING & CARE

| | |
|----------------------|-------|
| Maintenance Cleaning | 50-51 |
| Finished Floors | 52-54 |
| Oiled / Waxed Floors | 55-57 |

HOME

| | |
|------------------------------|-------|
| Cleaning & Care for the Home | 58-63 |
|------------------------------|-------|

ABRASIVES & PADS

| | |
|-------------------------|----|
| Sanding Recommendations | 65 |
| Ceramic | 66 |
| Zircon | 67 |
| Aluminum Oxide | 68 |
| Other Abrasives & Pads | 69 |

TOOLS & ACCESSORIES

| | |
|------------------------|-------|
| Application Tools | 70-72 |
| Range of Use - Rollers | 73 |
| Accessories | 74-75 |
| Joint Sealer & Repair | 76 |

Use our download area:

- Set-up recommendations
- Technical information
- Application videos

→ www.loba.de/int_en/downloads



@loba_on_top



LOBA On Top



lobaontop1922

www.loba.de

LOBA On Top!

LOBA loves beautiful floors. With over 100 years of experience, we offer you innovative premium products for the creation, finishing and maintenance of surfaces made of wood and cork, as well as resilient and mineral floorings. LOBA attaches the highest value to user-friendly, safe and sustainable products. Out of responsibility towards people and nature, we have long focused on the development of environmentally compatible, solvent-free systems – for a living environment that makes us all feel good.



You can find all of LOBA's milestones since 1922 here.

ORANGE ZONE

The inaugural issue of the LOBA customer magazine, ORANGE ZONE, is published in April. Informative and practical, this German-English bilingual magazine provides added value in the areas of news, technology, and service."

2023

100 YEARS LOBA

"Creating the future together" – LOBA celebrates 100 years of technical excellence and innovation, passion, and outstanding service.

LOBA On Top! Produced in Germany – made for the world.

2022

NEW GROUND

Cool, individual, timeless – minimal industrial style through an exposed concrete look: Market launch of the Factory Line, LOBA's first water-based finish system for leveling compounds.

INVISIBLE SURFACE PROTECTION

Market launch of the invisible water-based surface protection 2K InvisibleProtect. Thanks to its innovative technology, it achieves a look and feel that appears even more natural than raw wood.

2015

INVESTMENT IN THE FUTURE

The new logistics and training center in Ditzingen, Germany is opened.

2006

PARTNERSHIP WITH WAKOL

FOUNDING

On April 13, 1922, Wilhelm Hornung and Dr. Max Fischer found Vereinigte Wachswarenfabriken AG Hornung und Dr. Fischer in Ditzingen, near Stuttgart, Germany.

1995


INNOVATION

With the introduction of the legendary WS 2K 95, the world's first water-based 2K hardwood floor finish system, LOBA sets a new standard in the industry.

1922

The product range includes floor stains, floor cleaners, floor polish, ski wax, shoe polish, leather grease, and household candles. Already in September 1922, 20 candle machines produce 85 tons of household candles.

MILESTONES



Excellent! Sustainability at LOBA

When it comes to sustainability, LOBA solutions are the perfect companion for every step of the process – not just for new-builds, but also and especially in refurbishment projects. At the company level as well, we've set ourselves some lofty goals.



Mitglied der
DGNB
Deutsche Gesellschaft für Nachhaltiges Bauen
German Sustainable Building Council

REFURBISH INSTEAD OF USING NEW

Convince your customers to give hardwood flooring a second chance! Old flooring, when restored to a high standard, is often a beautiful alternative to new flooring. It also tells a story, and not infrequently turns out to be the more economical solution. By far, however, it's the more sustainable option: Renovating a hardwood floor conserves resources and is environmentally friendly. It also avoids waste and produces less CO₂ than a complete replacement.

PRODUCTS INSPIRED BY SUSTAINABILITY


As part of our traditional role as a pioneer in the development of water-based 2K finishes, sustainable formulas can be found throughout the range of LOBA finishing products – out of responsibility towards our customers, end users and employees. Numerous labels, such as the coveted GEVEMICODE®, the French “Emissions dans l'air intérieur” seal, or the Scandinavian “M1” mark, bear testimony to our commitment that extends far beyond national borders.

SUSTAINABLE AND FAIR: OUR DELIVERY PROCESSES

To make sure our suppliers meet our rigorous standards, they agree to our code of conduct, which requires them to understand, follow, and champion our values and principles in environmental protection, social responsibility, and governance. As part of this commitment, we have also dedicated ourselves the United Nations' Sustainable Development Goals.

ISO-CERTIFIED QUALITY AND ENVIRONMENTAL MANAGEMENT

LOBA has been DEKRA-certified since 2011 as compliant with ISO 9001 and ISO 14001. These certificates stand for high standards in quality and environmental management and confirm the ongoing improvement of our performance in terms of process, product and service quality as well as environmental protection. As a result, we operate a solid business with long-term personnel planning – and 100% of our electricity comes from green energy sources.

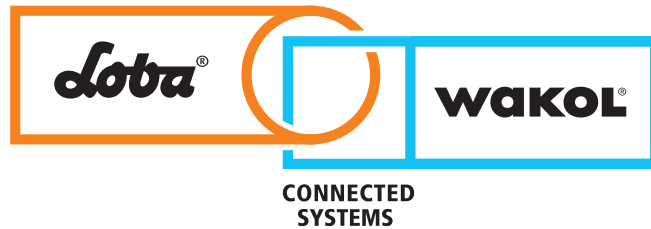

A STRONG CONNECTION FOR YOUR SUCCESS

Connected Systems
Perfect results
for your projects

Your benefits with LOBA Wakol Connected Systems

- Perfectly coordinated products
- Maximum safety during application
- Successful handling in a tried-and-tested, guaranteed system
- Exclusion of interactions between oils / finishes and adhesives
- Avoidance of dark run-ins at short end joints
- Avoidance of dark joints, since there is no softening of the finish layer
- Long-term quality assurance through regular tests in the event of formula adjustments

We care about your success!

| | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------------|-----------|---------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------------|--------|--------|--------|--------|---|---|---|---|--|
| | | WAKOL | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 1K ADHESIVES | | | | | | | | | | | | | | | 2K ADHESIVES | | | | | | | | | |
| | | D 1640 | D 1690 | MS 228 | MS 230 | MS 232 | MS 239 | MS 258 | MS 260 | MS 261 | MS 262 | MS 265 | MS 290 | MS 292 | MS 299 | PU 385 | PU 210 | PU 215 | PU 216 | PU 220 | PU 225 | | | | | |
| LOBA FINISHES | 1K FINISH | EasyFinish Neo | ✓ | ✓ | | | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| | | EasyFinish | ✓ | ✓ | | | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| | | Speed | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| | | Viva | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| | | Life | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| | 2K FINISH | 2K InvisibleProtect | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| | | 2K Supra A.T. | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| | | 2K Duo | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| | | 2K Fusion | ✓ | ✓ | | | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| | | 2K Drive | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| LOBA OILS & WAXES | | 2K ImpactOil | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| | | 2K ImpactOil Color | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| | | Akzent 100 Oil | ✓ | ✓ | | | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| | | HardwaxOil EcoPlus | ✓ | ✓ | | | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| | | HardwaxOil | ✓ | ✓ | | | | | | | | | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| | | HardwaxOil Nature | ✓ | ✓ | | | | | | | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |

| | | WAKOL | | |
|------|---------------|---------------------------------|-------|-------|
| | | LEVELLING COMPOUND | | |
| | | Z 610 | Z 615 | Z 625 |
| LOBA | FINISH SYSTEM | FactoryBase und 2K FactoryStyle | | |
| | | ✓ | ✓ | ✓ |



Updated October 2024 | Subject to change | Updates can be found at www.loba.de and www.wakol.com
Professional use of the listed Connected Systems products is a key factor for successful results. Please take note of the respective technical data sheets of the products used.





Project: Juwelier Kutter 1825

Contractor: Das Parkett, Robert Dumančić

Product: 2K InvisibleProtect

Architect: Karolina Ćurić Architekten | www.karolinacuric.com

© Jonathan Sage | www.jonathansage.de

A modern interior space featuring a wall of vertical wood panels, a marble countertop with glass display cases, and a light-colored wood floor in a herringbone pattern. In the foreground, there are two cylindrical ottomans with a wood-grain texture. To the right, a potted plant and a modern chair are visible. An orange semi-transparent rectangle is overlaid on the right side of the image, containing the text.

LOBA loves hardwood floors

With LOBA premium systems, you can finish and protect hardwood floors in first-class quality. Our finishing products and oils offer ideal protection against dirt, wear, chemicals, and moisture and are perfect for finishing hardwood floors and cork. Solutions from LOBA are not only extremely robust and durable; they also offer an attractive appearance that accentuates the hardwood floor's natural charm.

Preparation is everything

With our water-based joint fillers, even large joints in hardwood flooring can be filled beautifully and small imperfections touched up, thereby resulting in the perfect color match, even on exotic wood.

Regardless of whether the surface of the hardwood floor is treated with impregnating oil, hardwax oil or finish, with LOBA fillers for your floor covering, you're ready for any challenge.



EasyFill

Water-based binder with high filling capacity.

- Easy to work with
- Closes even wider joints by one-time application
- No subsiding of the filler in the joint
- Very fast drying
- Excellent sandability; clearly visible and low adhesion on sanding paper
- Excellent color scheme for oiled and finished surfaces
- Applicable to all common European and exotic wood types
- Odor neutral

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|---|---|---------|
| 11039-000000 | 11/5l | 12/4 | 480/128 | W2+ |

APPLICATION DEVICE

Trowel

ml/m²

100

Wood



VivaFill

High-yield water-based binder.

- Extremely economical to use
- Odor neutral
- Rapid drying
- Easy and safe application
- Low VOC content

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|---|---|---------|
| 11511-000000 | 5l | 4 | 128 | W2+ |

APPLICATION DEVICE

Trowel

ml/m²

50



Wood



Fugenkittlösung

Binder with optimal colouring.

- Rapid drying
- Excellent sanding properties
- Exceptional color fidelity even with exotic wood species
- Prevents finish shrinkage

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|---|---|---------|
| 11085-100000 | 5l/12l | 4/- | 120/42 | G2 |


APPLICATION DEVICE

Trowel

ml/m²

100

Wood

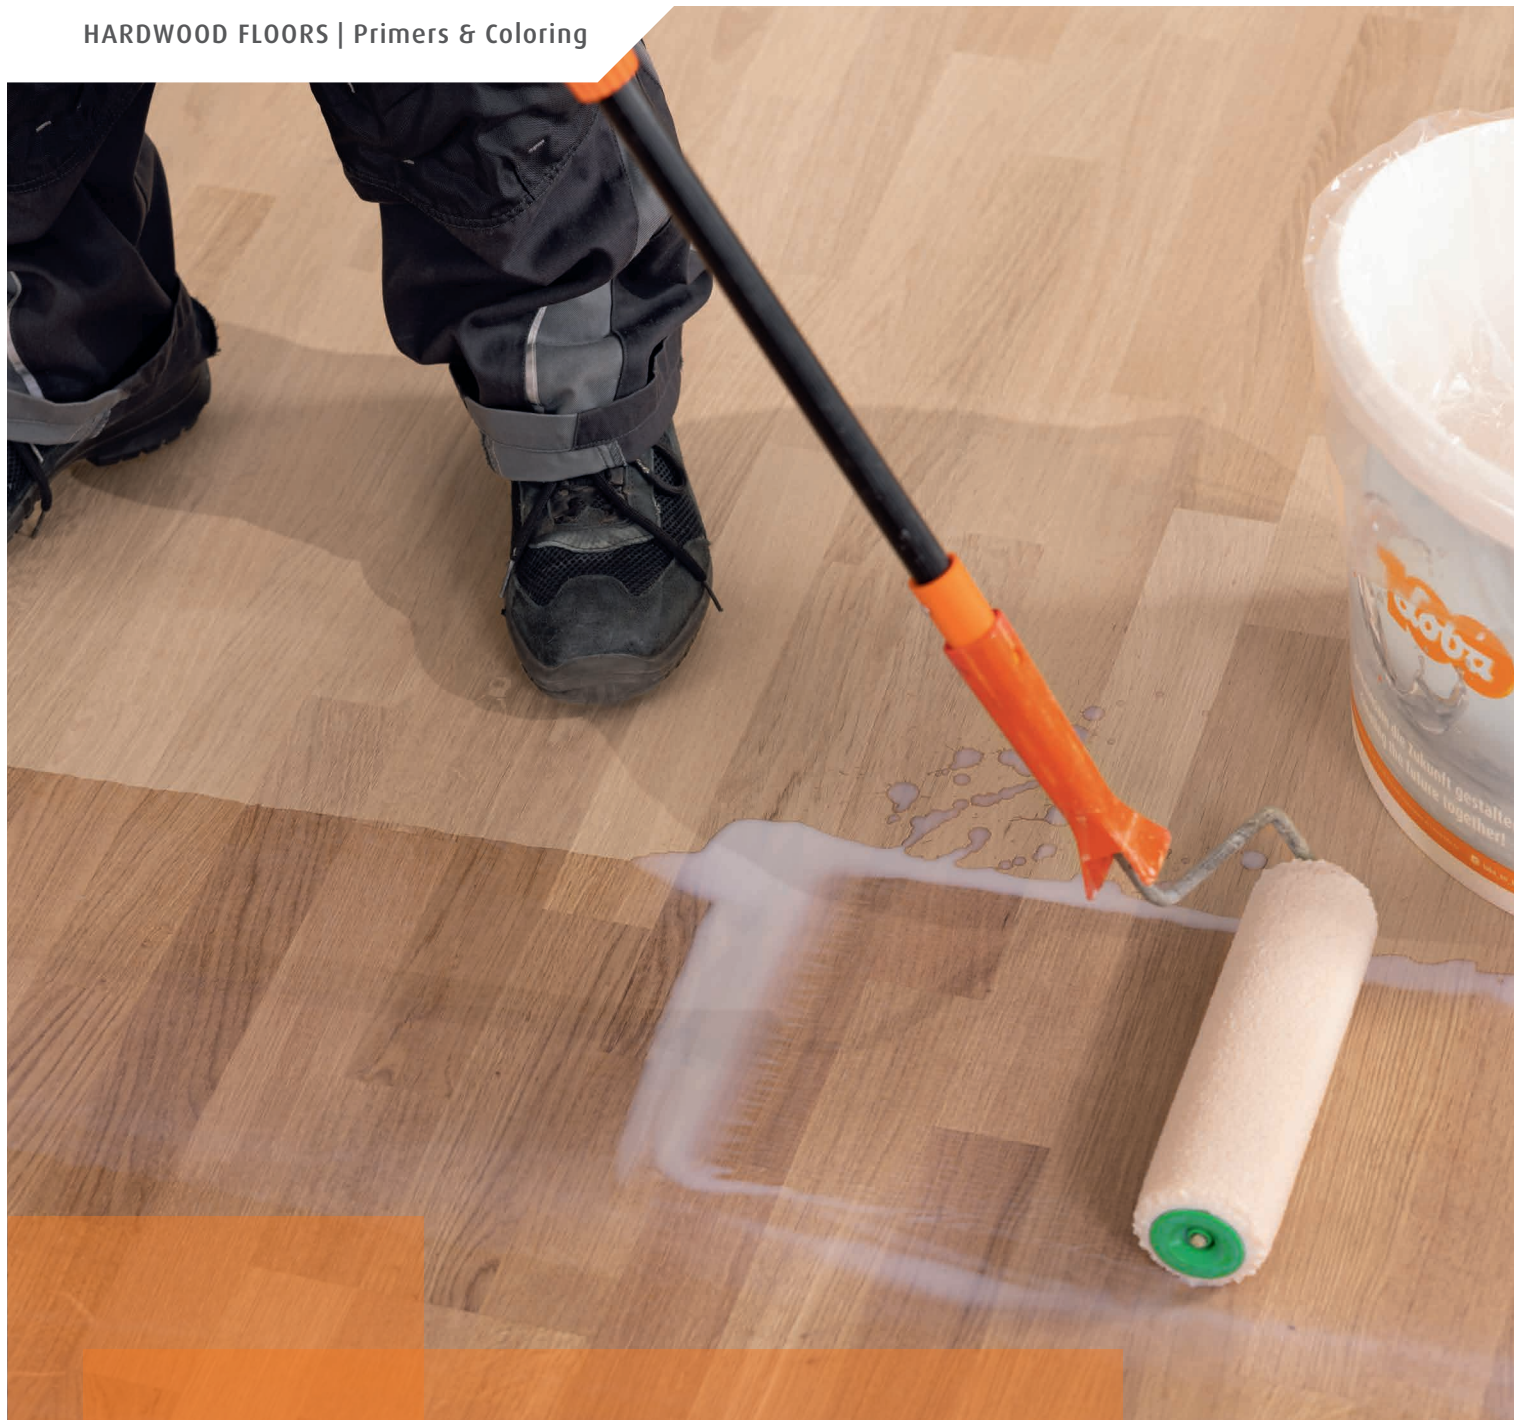

Primers – the optimal pre-treatment

Play it safe and prepare hardwood flooring with water-based primers from LOBA. These not only improve the adhesion on the surface, but also seal in timber constituents and reduce the risk of side bonding and lap marks. LOBA primers, depending on the selection, can be used on European and exotic hardwoods, as well as in gyms and multi-purpose halls. If you want to color and subsequently finish hardwood flooring, you can create color accents with a special pre-treatment in order to produce a customized room setting.



EasyPrime

Light ambering primer for wooden floors, suitable for almost all wood species.

- Used on millions of m² worldwide every year
- All-rounder offering maximum processing reliability
- Premium quality at a fair price
- Reduces side bonding
- Suitable for use with practically all European and exotic woods, as well as in sports and multipurpose halls

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|---|---|---------|
| 11036-900000 | 1l/5l/10l | 12/4/- | 480/128/60 | W3+ |

| APPLICATION DEVICE | ml/m ² |
|---------------------------------------|-------------------|
| Universal 100 roller | 100 - 120 |
| Microfibre 100 - 120 roller | |
| Trowel (2 in a cross-wise pattern) | 40 - 60 |

Wood



VivaPrime

Ambering primer for wooden floors, suitable for light wood species.

- Reduces side bonding
- Suitable for renovation and new installation
- Good price/performance ratio
- Easy and safe application

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|---|---|---------|
| 11518-000000 | 5l/10l | 4/- | 128/60 | W2+ |

| APPLICATION DEVICE | ml/m ² |
|---------------------------------------|-------------------|
| Universal 100 roller | 100 - 120 |
| Microfibre 100 - 120 roller | |
| Trowel (2 in a cross-wise pattern) | 40 - 60 |

Wood



PrimaSeal Plus

Ambering primer for wooden floors, suitable for almost all wood species.

- Easy and safe application
- Excellent blocking of wood ingredients and old contamination
- Intensifies the color of the wood
- Good price/performance ratio

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|---|---|---------|
| 11033-600000 | 5l | 4 | 128 | G1 |

| APPLICATION DEVICE | ml/m ² |
|----------------------|-------------------|
| Universal 100 roller | 100 - 120 |

Wood



2K Intensive

Heavy ambering high-solid 2-component oil-based primer for wooden floors, suitable for almost all wood species.

- Significant deepening of the wood color
- Cobalt and butanoxime-free
- Combines oiled look with the advantages of finished surfaces
- Easy and safe application
- No roughening of the wood
- No side-bonding effect

APPLICATION DEVICE

Microfibre 60 - 80 oil roller

g/m²

20 - 40

Wood



| ART.-NO. | VARIANT | | | | GISCODE |
|--------------|-------------|--------------|---|---------|---------|
| 11053-000000 | Transparent | 600 g/2.5 kg | 4 | 320/120 | Ö40/DD+ |



2K Intensive Color

Coloured high-solid 2-component oil-based primer for wooden floors, suitable for almost all wood species.

- All variants can be mixed with each other
- Cobalt and butanoxime-free
- Easy and safe application
- Versatile design options
- No roughening of the wood
- No side-bonding effect

APPLICATION DEVICE

Microfibre 60 - 80 oil roller

g/m²

20 - 40

Wood




| ART.-NO. | VARIANT | | | | GISCODE |
|-----------|----------------|--------|---|-----|---------|
| 11053-... | Various colors | 2.5 kg | 4 | 120 | Ö40/DD+ |

All colors are also available in sample cans.




Classic Grey




Country White




Ebony




Golden Oak



Gunstock




Jacobean




Mesquite Red




Provincial




Sedona Red



Special Walnut



Weathered Oak



Chalk

Color samples are not binding



ProColor

Stain for wooden floors.

- Versatile design options
- Easy and safe application
- All variants can be mixed with each other
- Variety of possible combinations

APPLICATION DEVICE

Trowel
Microfibre 60 - 80 oil
roller as a wiper

ml/m²

30 - 50


Wood




Loba GmbH & Co. KG
Zemmergasse 14 • 48699 Bielefeld
Tel. 0521 300-1000
www.loba.de

| ART.-NO. | VARIANT |  |  |  | GISCODE |
|-----------|----------------|---|---|---|---------|
| 11012-... | Various colors | 750 ml | 6 | 432 | G1 |


All colors are also available in sample cans.




Transparent




Jatoba




Kambala




Mahogany




Papyrus




Smoked oak




Black



Sucupira



Wenge



White

Color samples are not binding



Tools and accessories – only
the best for professionals!

See page 70

List of Wood Species for Primers & Finish Systems

1. European wood species

| Wood type | 2K Intensive | EasyPrime | | VivaPrime | | PrimaSeal Plus | 2K Invisible Protect* | Speed* | Life* |
|--------------------------------|--------------|-----------|----------|-----------|----------|----------------|-----------------------|--------|-------|
| | | Rolled | Troweled | Rolled | Troweled | | | | |
| Maple | + | + | + | + | + | + | + | + | + |
| Acacia / Robinia | + | ◇ | - | ◇ | - | + | ◇ | ◇ | ◇ |
| Acacia / steam-treated Robinia | + | ◇ | - | ◇ | - | + | ◇ | + | ◇ |
| Birch | + | + | + | + | + | + | + | + | + |
| Pear tree | ◇ | - | - | - | - | - | - | - | - |
| Steam-treated beech | + | + | - | ◇ | - | + | ◇ | ◇ | ◇ |
| Beech | + | + | + | + | + | + | + | + | + |
| Oak | + | + | + | + | + | + | + | + | + |
| Alder | + | + | ◇ | + | ◇ | + | + | + | + |
| Ash | + | + | + | + | + | + | + | + | + |
| Spruce | + | + | + | + | + | + | + | + | + |
| Chestnut | + | + | ◇ | + | ◇ | + | + | + | + |
| Pine | + | + | - | + | - | + | + | + | + |
| Cherry | + | + | - | ◇ | - | + | ◇ | + | ◇ |
| Larch | + | ◇ | - | ◇ | - | + | ◇ | + | ◇ |
| Walnut | + | ◇ | - | ◇ | - | ◇ | ◇ | ◇ | ◇ |
| Olive | + | + | - | ◇ | - | + | ◇ | ◇ | ◇ |
| Smoked oak | + | ◇ | - | ◇ | - | ◇ | ◇ | - | ◇ |
| Red oak | + | + | + | + | + | + | + | + | + |
| Elm | + | + | ◇ | ◇ | ◇ | + | ◇ | ◇ | ◇ |

2. Exotic wood species

| | | | | | | | | | |
|----------------------------|---|---|---|---|---|---|---|---|---|
| Afrormosia | + | + | - | ◇ | - | + | ◇ | + | ◇ |
| Arura Vermelho | + | - | - | - | - | + | - | + | - |
| Bamboo | - | + | - | + | - | + | + | - | + |
| Steam-treated bamboo | - | + | - | ◇ | - | + | ◇ | ◇ | ◇ |
| Bilinga | + | + | - | ◇ | - | + | ◇ | ◇ | ◇ |
| Basra locus | + | + | - | ◇ | - | + | ◇ | ◇ | ◇ |
| Cabreuva | + | + | - | ◇ | - | + | ◇ | ◇ | ◇ |
| Steam-treated coigue | + | + | - | ◇ | - | + | ◇ | ◇ | ◇ |
| Cumaru / almendrillo | + | + | - | ◇ | - | + | ◇ | ◇ | ◇ |
| Curupau | + | + | - | ◇ | - | + | ◇ | ◇ | ◇ |
| Doussie / afzelia | + | ◇ | - | ◇ | - | + | ◇ | + | ◇ |
| Ebony / macassar | - | + | - | ◇ | - | + | ◇ | - | ◇ |
| Eucalyptus / spotted gum | + | + | - | ◇ | - | + | ◇ | + | ◇ |
| Eucalyptus / jarrah | + | + | - | ◇ | - | + | ◇ | + | ◇ |
| Guatambu | + | + | - | ◇ | - | + | ◇ | + | ◇ |
| Hevea | + | + | - | + | - | + | + | + | + |
| Incienso Colorado | + | + | - | ◇ | - | + | ◇ | + | ◇ |
| Ipe / lapacho | ◇ | ◇ | - | ◇ | - | ◇ | ◇ | ◇ | ◇ |
| Iroko / kambala | - | - | - | - | - | ◇ | - | - | - |
| Iron wood | + | + | - | ◇ | - | + | ◇ | + | ◇ |
| Jatoba / Brazilian cherry | + | ◇ | - | ◇ | - | + | ◇ | + | ◇ |
| Kempas | - | ◇ | - | ◇ | - | + | ◇ | ◇ | ◇ |
| Coconut | + | + | - | ◇ | - | + | ◇ | + | ◇ |
| Kotibe | + | + | - | ◇ | - | + | ◇ | + | ◇ |
| Mahogany | + | + | - | ◇ | - | + | ◇ | + | ◇ |
| Massaranduba | + | + | - | ◇ | - | + | ◇ | ◇ | ◇ |
| Mecrusse | + | ◇ | - | ◇ | - | + | ◇ | ◇ | ◇ |
| Merbau | + | ◇ | - | ◇ | - | + | ◇ | ◇ | ◇ |
| Muhuhu | + | - | - | - | - | + | - | - | - |
| Mutenye | + | + | - | ◇ | - | + | ◇ | + | ◇ |
| Padouk | + | + | - | ◇ | - | + | ◇ | + | ◇ |
| Panga Panga | + | + | - | ◇ | - | + | ◇ | + | ◇ |
| Palisander | - | + | - | ◇ | - | + | ◇ | ◇ | ◇ |
| Piguia Marfin | + | - | - | - | - | + | - | - | - |
| Pitch pine (old floors) | + | + | - | + | - | + | + | + | + |
| Hard pine (pitch pine new) | + | + | - | ◇ | - | + | ◇ | ◇ | ◇ |
| Purpleheart | + | - | - | - | - | + | - | - | - |
| Sucupira | + | + | - | ◇ | - | + | ◇ | + | ◇ |
| Tasmanian oak | + | + | + | + | + | + | + | + | + |
| Tauari | + | + | - | + | - | + | + | + | + |
| Teak | + | + | - | ◇ | - | + | ◇ | + | ◇ |
| Tigerwood | + | + | - | ◇ | - | + | ◇ | + | ◇ |
| Wenge | + | + | - | ◇ | - | + | ◇ | + | ◇ |
| Yvyro | + | + | - | ◇ | - | + | ◇ | + | ◇ |
| Cypress | + | + | - | ◇ | - | + | ◇ | + | ◇ |

3. Other substrates

| | | | | | | | | | |
|-----------------|---|---|---|---|---|---|---|---|---|
| Multiplex | ◇ | - | + | ◇ | + | ◇ | ◇ | ◇ | ◇ |
| OSB plates | ◇ | - | + | ◇ | + | ◇ | ◇ | ◇ | ◇ |
| V100 chipboards | ◇ | - | + | ◇ | + | ◇ | ◇ | ◇ | ◇ |

+ = Can be used without restrictions

◇ = Use may lead to problems.
We recommend consulting LOBA

- = Use not recommended

* Can be used in set-up without primer

Application Tools for Primers & Finish Systems



| | | OIL ROLLER | FINISH ROLLER | | | TROWEL |
|--|---------------------|------------------|-----------------|----------------|----------------|----------------|
| | | Micro 60 - 80 | Micro 100 - 120 | Universal 100 | Deluxe 120 | Trowel |
| | | ART.-NO. 16236-1 | ART.-NO. 16236 | ART.-NO. 16233 | ART.-NO. 16234 | ART.-NO. 16083 |
| | EasyPrime | – | ✓ | ✓ | – | ✓ |
| | VivaPrime | – | ✓ | ✓ | – | ✓ |
| | PrimaSeal Plus | – | – | ✓ | – | – |
| | 2K Intensive | ✓ | – | – | – | – |
| | ProColor | ✓* | – | – | – | ✓ |
| | FactoryBase | – | ✓ | ✓ | – | – |
| | 2K Contact | ✓ | – | – | – | – |
| | EasyFinish | – | ✓ | – | ✓ | – |
| | Viva | – | ✓ | – | ✓ | – |
| | Life | – | ✓ | – | ✓ | – |
| | 2K InvisibleProtect | – | – | – | ✓ | – |
| | 2K Supra A.T. | – | ✓ | – | ✓ | – |
| | 2K Duo | – | ✓ | – | ✓ | – |
| | 2K Fusion | – | ✓ | – | ✓ | – |
| | Rush | – | – | ✓ | – | – |

✓ = Can be used without restrictions

– = Use not recommended

* = Observe technical information

Use our download area

- Set-up recommendations
- Technical information
- Application videos



→ www.loba.de/int_en/downloads

Consumption calculator

Your handy helper for quickly calculating how much you need can be found at www.loba.de/int_en/services and on every product page.





Water-based finishes – sustainable and easy to work with

Professionally laid floors maintain their perfect appearance with the right finishing. The right finishing also ensures ideal protection against dirt, wear, chemicals and moisture across the whole surface and for a long time. Whether you want to finish a hardwood floor or make cork flooring water-resistant – LOBA offers you water-based premium systems for every area of application.



EasyFinish Neo

1-component parquet finish with 2-component performance based on renewable resources for particularly heavy-duty use.

- 2K performance in a practical 1K system
- Long-lasting beauty of the floor – high resistance to mechanical wear and household chemicals
- LOBA Easy-Handling technology
- Based on renewable raw materials
- 25 % CO₂ reduction compared to the industry standard
- In combination with LOBA SportCare or LOBA Refresh, fulfills the requirements for sliding friction in accordance with DIN 18032 for sports floors

| ART.-NO. | VARIANT | | | | GISCODE |
|--------------|------------|--------|-----|--------|---------|
| 11510-000003 | satin | 5l/10l | 4/- | 128/60 | W2+ |
| 11510-000001 | semi-gloss | 5l/10l | 4/- | 128/60 | |

APPLICATION DEVICE

Deluxe 120 roller
Microfibre 100 - 120 roller

ml/m²
100 - 120

Stress level



Wood | Cork



go easy
get neo!



2K PERFORMANCE



RENEWABLE RESOURCES






CO₂ REDUCTION



EasyFinish

1-component parquet finish with 2-component performance for particularly heavy-duty use.

- Easy 1K system combined with 2K performance
- Outstanding application qualities – easy to use and safe, no lap marks
- Suitable for almost all wood species as well as cork
- EasyFinish semi-gloss combined with LOBA SportCare meets the requirements for friction according to DIN 18032 for sports floors
- Long-lasting beauty of the floor – high resistance to mechanical wear and household chemicals
- Meets all requirements of ÖNORM C2354:2009 for the highest stress class

| ART.-NO. | VARIANT |  |  |  | GISCODE |
|--------------|------------|---|---|---|---------|
| 11517-000003 | satin | 1l/5l/10l | 12/4/- | 480/128/60 | W3+ |
| 11517-000001 | semi-gloss | 1l/5l/10l | 12/4/- | 480/128/60 | |
| 11517-000002 | gloss | 5l | 4 | 128 | |

APPLICATION DEVICE ml/m²

Deluxe 120 roller | 100 - 120




Microfibre 100 - 120 roller




Stress level

1 2 3 4 5 6 7 8 9 10

Residential Commercial Extreme

Wood | Cork




1) semi-gloss



Viva

1K parquet finish for normal to heavy use.

- Excellent chemical resistance and high abrasion resistance
- Very good resistance to black heel marks
- Powerful resistance to plasticisers from parquet adhesives
- Easy and safe application, no lap marks
- Full "Connected Systems" approval
- Low VOC content
- Very low emission, certified to EMICODE® EC1

| ART.-NO. | VARIANT |  |  |  | GISCODE |
|--------------|------------|---|---|---|---------|
| 11519-100003 | satin | 5l/10l | 4/- | 128/60 | W2+ |
| 11519-100001 | semi-gloss | 1l/5l/10l | 12/4/- | 480/128/60 | |

APPLICATION DEVICE ml/m²

Deluxe 120 roller | 100 - 120




Microfibre 100 - 120 roller

Stress level

1 2 3 4 5 6 7 8 9 10

Residential Commercial Extreme

Wood




  



Life

1-component parquet finish for normal use.

- Good price/performance ratio
- Can be used in full structure
- Balanced properties
- High filling capacity
- Easy and safe application

| ART.-NO. | VARIANT |  |  |  | GISCODE |
|--------------|------------|---|---|---|---------|
| 11524-900003 | satin | 5l/10l | 4/- | 128/60 | W2+ |
| 11524-900001 | semi-gloss | 5l/10l | 4/- | 128/60 | |
| 11524-900002 | gloss | 5l | 4 | 128 | |

APPLICATION DEVICE ml/m²

Deluxe 120 roller | 100 - 120




Microfibre 100 - 120 roller

Stress level

1 2 3 4 5 6 7 8 9 10

Residential Commercial Extreme

Wood



Speed

1K parquet finish for effective, time-saving 2-layer full build-up.

- High solids content
- Coat thickness corresponds to a 3-coat set-up
- Excellent sandability
- Intensifies the color of the wood
- Powerful resistance to plasticisers from parquet adhesives
- Very easy to use

| ART.-NO. | VARIANT | | | | GISCODE |
|--------------|------------|--------|-----|--------|---------|
| 11568-000003 | satin | 5l/10l | 4/- | 128/60 | W2+ |
| 11568-000001 | semi-gloss | 5l/10l | 4/- | 128/60 | |

APPLICATION DEVICE

Deluxe 120 roller

ml/m²

120 - 150

Stress level



Wood





2K InvisibleProtect

New-generation surface protection for parquet and wooden floors.

- Natural structure and feel like untreated wooden flooring
- 2-coat system without primer
- Easy to work with
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas
- No polishing effect
- Excellent chemical resistance
- As easy to clean as finished surfaces
- No grain accentuation, the original color of the wood remains as it was in its original state
- Meets all requirements of ÖNORM C2354:2009 for the highest stress class

| ART.-NO. | | | | GISCODE |
|--------------|-----------|-----|--------|---------|
| 11474-000005 | 1 kg/5 kg | 6/2 | 360/96 | W2/DD+ |

| | | |
|---------------------------|------------|-------------|
| APPLICATION DEVICE | | g/m² |
| Deluxe 120 roller | | 110 - 130 |
| Stress level | | |
| | | |
| Residential | Commercial | Extreme |
| Wood Cork | | |
| | | |



2K Supra A.T.

Ceramic-reinforced 2-component polyurethane parquet finish for floors with particularly high resistance for the highest demands.

- Fully usable after 12 hours
- Sets new standards in quality
- Meets highest demands
- Extremely high scratch resistance thanks to ceramic components
- Qualified for various floorings
- Meets all requirements of ÖNORM C2354:2009 for the highest stress class

| ART.-NO. | VARIANT | | | | GISCODE |
|--------------|------------|------|---|----|---------|
| 11465-000003 | satin | 5 kg | 2 | 96 | W3/DD+ |
| 11465-000001 | semi-gloss | 5 kg | 2 | 96 | |

APPLICATION DEVICE

g/m²

Deluxe 120 roller

Microfibre 100-120 roller

100 - 120

Stress level

Residential

Commercial

Extreme

Wood | Cork

Informa Consumer & Co. KG
Kunststoff-Produkte, Beschleunigte
nach DIN-Verfahren
0102 1902

1

ÉMISSIONS DANS L'AIR INTÉRIEUR

DIN 18032

EN 14904

R9

6-10°

1) satin



2K Duo

2-component polyurethane parquet finish for extremely heavy-duty use.

- Easy and safe application
- Very low emission, certified to EMICODE® EC1 Plus
- Qualified for various floorings
- Excellent wear resistance
- Excellent chemical resistance
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas

| ART.-NO. | VARIANT | | | | GISCODE |
|--------------|-------------|-----------|-----|--------|---------|
| 11466-900004 | extra-matte | 5 kg | 2 | 96 | W3/DD+ |
| 11466-900003 | satin | 1 kg/5 kg | 6/2 | 360/96 | W2/DD+ |
| 11466-900001 | semi-gloss | 1 kg/5 kg | 6/2 | 360/96 | W2/DD+ |
| 11466-900002 | gloss | 5 kg | 2 | 96 | W3/DD+ |

APPLICATION DEVICE

Deluxe 120 roller

Microfibre 100 - 120 roller

g/m²

100 - 120

Stress level



Wood | Cork



1) satin, semi-gloss



2K Fusion

2-component polyurethane parquet finish for particularly heavy-duty use.

- Easy and safe application
- Excellent wear resistance
- Good price/performance ratio
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas
- Meets all requirements of ÖNORM C2354:2009 for the highest stress class

| ART.-NO. | VARIANT | | | | GISCODE |
|--------------|------------|------|---|----|---------|
| 11471-000003 | satin | 5 kg | 2 | 96 | W3/DD+ |
| 11471-000001 | semi-gloss | 5 kg | 2 | 96 | W3/DD+ |

APPLICATION DEVICE

Deluxe 120 roller

Microfibre 100 - 120 roller

g/m²

100 - 120

Stress level



Wood | Cork



2K Drive

2-component parquet finish for heavy-duty use.

- Highly resistant to plasticizers from parquet adhesives
- Easy and safe application
- Excellent resistance
- Excellent price-performance ratio

| ART.-NO. | VARIANT | | | | GISCODE |
|--------------|-------------|------|---|----|---------|
| 11410-000004 | extra-matte | 5 kg | 2 | 96 | W3/DD+ |
| 11410-000003 | satin | 5 kg | 2 | 96 | W3/DD+ |

APPLICATION DEVICE

Deluxe 120 roller

Microfibre 100 - 120 roller

g/m²

100 - 120

Stress level



Wood





Whitener

Additive for brightening wood surfaces.

- Creates a smooth brightening of the wood surface
- Intensifies the whitening effect of white colored surfaces
- Variable control of brightening intensity
- May be combined with all water-based primers and finishes from LOBA
- Reduces the natural yellowing of the wood
- Provides individual design options
- Water-based technology, solvent-free
- Simple and safe application

2K InvisibleProtect and Whitener for a Scandinavian appearance

See page 22



ART.-NO.



80 ml



15

GISCODE

W1

11540-900126



Amberizer

Additive to achieve a color intensification of wood surfaces.

- May be combined with all water-based primers and finishes from LOBA
- Adjustment of newly finished surfaces to solvent-containing finished existing surfaces
- Water-based technology, solvent-free
- Simple and safe application

ART.-NO.



100 ml



15

GISCODE

W1

11540-800217



SlipResist

Additive to improve the anti-slip properties.


- Certified slip resistance
- Additive has no negative effects on the soiling behavior
- Water-based technology, solvent-free
- Simple and safe application
- Simplified storage



| ART.-NO. | | |
|--------------|-------|----|
| 11018-000000 | 100 g | 15 |

SlipResist for application in the final coat.

The following finishes achieve a certified anti-slip rating of R10 or R11 according to DIN EN 16165:2023-02 when SlipResist is added.

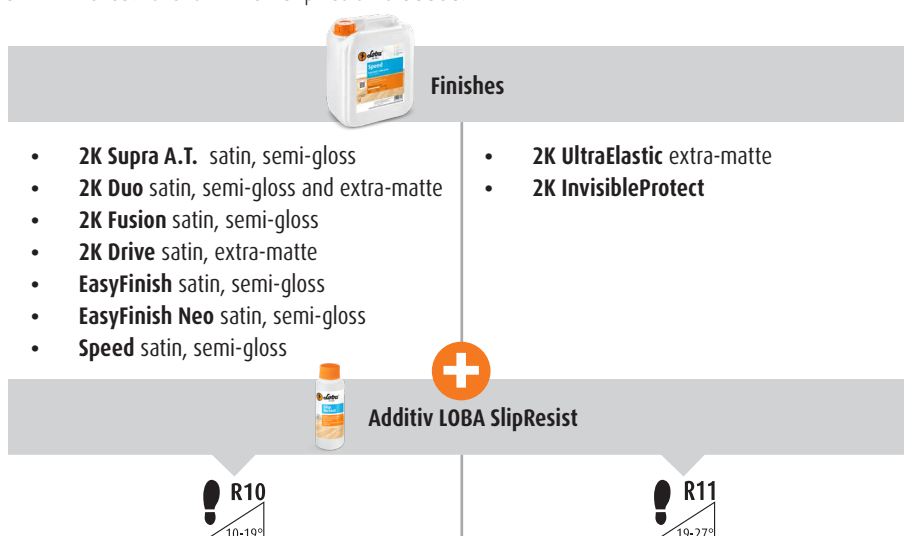

UV-Protect

Prevents the UV-light induced yellowing of light colored wood species.

- Original appearance of the wood is preserved long-term
- Can be used for all water-based LOBA finishes
- Innovation by LOBA

| ART.-NO. | | |
|--------------|--------|----|
| 11017-000000 | 100 ml | 15 |



Argo

Additive to prolong the drying time.

- Reduces the risk of lap marks
- Finish film properties are unchanged

| ART.-NO. | | |
|--------------|--------|----|
| 11015-000000 | 250 ml | 12 |



Rush

UV-curing 1-component water-based polyurethane finish for wooden floors.

- Sets new standards in quality
- Meets highest demands
- Long durability
- Robust surface
- No waiting time until use

| ART.-NO. | VARIANT |  |  | GISCODE |
|--------------|---------|---|---|---------|
| 11611-000003 | satin | 10 l | 60 | W2+ |

APPLICATION DEVICE

Universal 100 roller

g/m²

100

Stress level



Wood



Maximum environmentally friendly and ultra-fast:
UV on-site wood floor finish

Our water-based, low-emission and scratch-resistant solution when time is short.




2K Contact

2-component adhesive primer for refinishing UV cured oxide containing factory finished hardwood and cork floors without intermediate sanding.

- Recommended by leading industrial wood floor manufacturers
- Extremely economical to use
- Enables dust-free renovation
- Original appearance remains preserved during restoration
- Time and cost saving

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|---|---|---------|
| 11520-000000 | 750 g | 4 | 384 | W3/DD+ |

| APPLICATION DEVICE |  |
|-------------------------------|---|
| Trowel | 10 |
| Microfibre 60 - 80 oil roller | 30 |

Wood



TopGel

Polyurethane trowel finish to achieve a fuller surface.

- Prepares the surface for the last coat
- Visually fuller surface
- Extremely economical to use

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|---|---|---------|
| 11455-000000 | 4 kg | 4 | 84 | W3+ |

| APPLICATION DEVICE |  |
|--------------------|---|
| Trowel | 20 |

Wood



Renovation with 2K Contact

Standard recommendation for a renovation without sanding

- After tack-free drying (approx. 2 hours), finish with 2K Supra A.T. or 2K Duo (not gloss)
- Carefully apply one coat of 2K Contact using the LOBA trowel or the LOBA oil roller Micro 60-80
- If necessary, set up a test area and carry out an adhesion test
- Allow sufficient drying time; overnight drying for absorbent surfaces
- Prepare the substrate, remove non-load-bearing coats, use an intensive cleaner if necessary

i Please note the detailed technical information, processing instructions and recommended finishes.

With cleaning and care products, you can maintain the beauty of your floors in the long term.



Oils and waxes for naturally beautiful floors

Nothing brings out the naturalness and texture of hardwood flooring as beautifully as oil and wax. LOBA's first-class oil and wax systems perform this task sustainably. Based on natural raw materials, they impress with outstanding properties such as high wear resistance, a water- and dirt-repellent formula and excellent resistance to chemicals.



2K ImpactOil

Solvent-free, 2-component high-solid penetrating oil based on natural ingredients for wooden floors.

- Excellent water resistance for parquet flooring in wet zones such as bathrooms or spa areas
- Time-saving processing in a 1-day system
- Extremely economical to use
- 100% solid – solvent-free
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas
- Easy and safe application
- One roller application is sufficient
- Can be used after only 24 hours
- Suitable for children's toys as per EN 71-3
- Oxime and cobalt free

APPLICATION DEVICE

Microfibre 60 - 80 oil roller

g/m²

30 - 60

Wood | Trowelled floors



| ART.-NO. | VARIANT |  |  |  | GISCODE |
|--------------|-------------|---|---|---|---------|
| 10610-000000 | Transparent | 750 g/2.5 kg | 4 | 400/120 | Ö10/DD+ |



Project: Hotel Süllberg

Product: 2K ImpactOil

Contractor: Parkett Berndt, Neuenkirchen-Grauen




PreTone

Water-based pigment stain for wooden floors.

- For significantly bolder colors
- Reduced oil-specific yellowing
- Easy and safe application
- Solvent-free
- Virtually limitless color combinations are possible
- Odor neutral


| ART.-NO. | VARIANT |  |  |  | GISCODE |
|-----------|----------------|---|---|---|---------|
| 10612-... | Various colors | 2.5l | 6 | 144 | W2+ |

All colors are also available in sample cans.



WhiteBlackBrownMochaSteel

Color samples are not binding

| APPLICATION DEVICE | |  |
|---|--|---|
| Microfibre 100 - 120 roller as a wiper | | 100 - 120 |
| Spray can and applicator | | |
| Wood | | |



Project: Castle Haslemere, United Kingdom
Product: 2K ImpactOil Color – various colors
Contractor: Woodfloors of Hampshire, Kieren Collins



2K ImpactOil Color

Colored, solvent-free 2-component high-solid penetrating oil based on natural ingredients for wooden floors.

- Excellent water resistance for parquet flooring in wet zones such as bathrooms or spa areas
- Time-saving processing in a 1-day system
- Extremely economical to use
- 100% solid – solvent-free
- All variants can be mixed with each other
- Easy and safe application
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas
- Suitable for children's toys as per EN 71-3
- Oxime and cobalt free

APPLICATION DEVICE

Trowel

g/m²

30 - 60

Wood



| ART.-NO. | VARIANT | | | | GISCODE |
|-----------|----------------|-------|---|-----|---------|
| 10610-... | Various colors | 750 g | 4 | 400 | 010/DD+ |

All colors are also available in sample cans.

10610-90 / SampleSet / 17 x 100 ml + 5 x 100 ml PreTone

| | | | | | | | |
|--------------|----------|--------|---------|------------|----------|-------|-------------|
| Basic colors | | | | | | | |
| | Black | White | Grey | | | | |
| Wood colors | | | | | | | |
| | Mahogany | Walnut | Kambala | Smoked oak | Sucupira | Wenge | Antique Oak |
| Trend colors | | | | | | | |
| | Papyrus | Chalk | Oyster | Clay | Sand | Pearl | Silver |

Color samples are not binding

Coloration with 2K ImpactOil Color

Standard recommendation for the coloring impregnation of hardwood floors.

6 After the penetration time, level out with a single-disc machine and LOBASAND SpecialPad beige

5 Apply a second layer of **2K ImpactOil Color** with trowel, allow to penetrate

4 After the penetration time, level out with a single-disc machine and LOBASAND SpecialPad beige

3 First application of **2K ImpactOil Color** with trowel, allow to penetrate

2 Optional: pretreatment with PreTone using LOBA Wischwiesel or LOBA Microfaser 100-120 finish roller as wiper

1 Preparation up to fine sanding



Please note the detailed technical information, processing instructions and set-up recommendations as well as technical tips and tricks „Sanding Instruction Staining of Wooden Floors“

Discover the infinite color variety of 2K ImpactOil Color, also in combination with PreTone.




With LOBA care and maintenance products, the beauty of your floors will persist.



Akzent 100 Oil

Solvent-free high-solid oil on natural base for wooden floors.

- Made of plant-based oils
- 100% solid – solvent-free
- Extremely economical to use
- High resistance to water
- Easy and safe application
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas
- Suitable for children's toys as per EN 71-3
- Oxime and cobalt free

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|---|---|---------|
| 10601-000000 | 750 ml/2.5l | 6/4 | 480/120 | Ö10+ |


APPLICATION DEVICE

Microfibre 60 - 80 oil roller
Trowel
(2 in a cross-wise pattern)

ml/m²

30 - 60

Wood









HardwaxOil Nature

Layer-forming hard wax oil for a smooth and full bodied raw wood appearance for wooden floors.

- Oxime and cobalt free
- Natural look of an untreated floor
- Smooth and full bodied appearance
- Natural, velvety feel
- Suitable for partial repairs
- Dirt resistant, easy to clean surface
- Anti-slip class R10 according to DIN EN 16165:2021-12
- Suitable for children’s toys as per EN 71-3

| APPLICATION DEVICE | | ml/m² |
|-------------------------------|--|---------|
| Microfibre 60 - 80 oil roller | | 40 - 60 |
| Oilbrush | | |
| Trowel | | 20 |

Wood | Cork



| ART.-NO. |  |  |  | GISCODE |
|--------------|---|---|---|---------|
| 10509-000009 | 750 ml/2.5 l | 6/4 | 480/120 | 060+ |



Our HardwaxOil Nature gives an impressive untreated raw wood look




Its special composition reduces grain accentuation typically produced by oil. For hardwood floors.








HardwaxOil

Layer-forming hard wax oil for a smooth and full bodied appearance for wooden floors.

- Oxime and cobalt free
- Smooth and full bodied appearance
- Natural, velvety feel
- Suitable for partial repairs
- Dirt resistant, easy to clean surface
- Anti-slip class R10 according to DIN EN 16165:2021-12
- Suitable for children's toys as per EN 71-3

| ART.-NO. | VARIANT |  |  |  | GISCODE |
|--------------|-------------|---|---|---|---------|
| 10509-000004 | extra-matte | 750 ml/2.5l/10l | 6/4/- | 480/120/42 | Ö60+ |
| 10509-000003 | satin | 750 ml/2.5l/10l | 6/4/- | 480/120/42 | |
| 10509-000001 | semi-gloss | 750 ml/2.5l/10l | 6/4/- | 480/120/42 | |

| APPLICATION DEVICE | | ml/m² |
|---|--|---------|
| Microfibre 60 - 80 oil roller | | 40 - 60 |
| Oilbrush | | |
| Trowel | | 20 |
| Wood Cork | | |
|     | | |
|  | | |








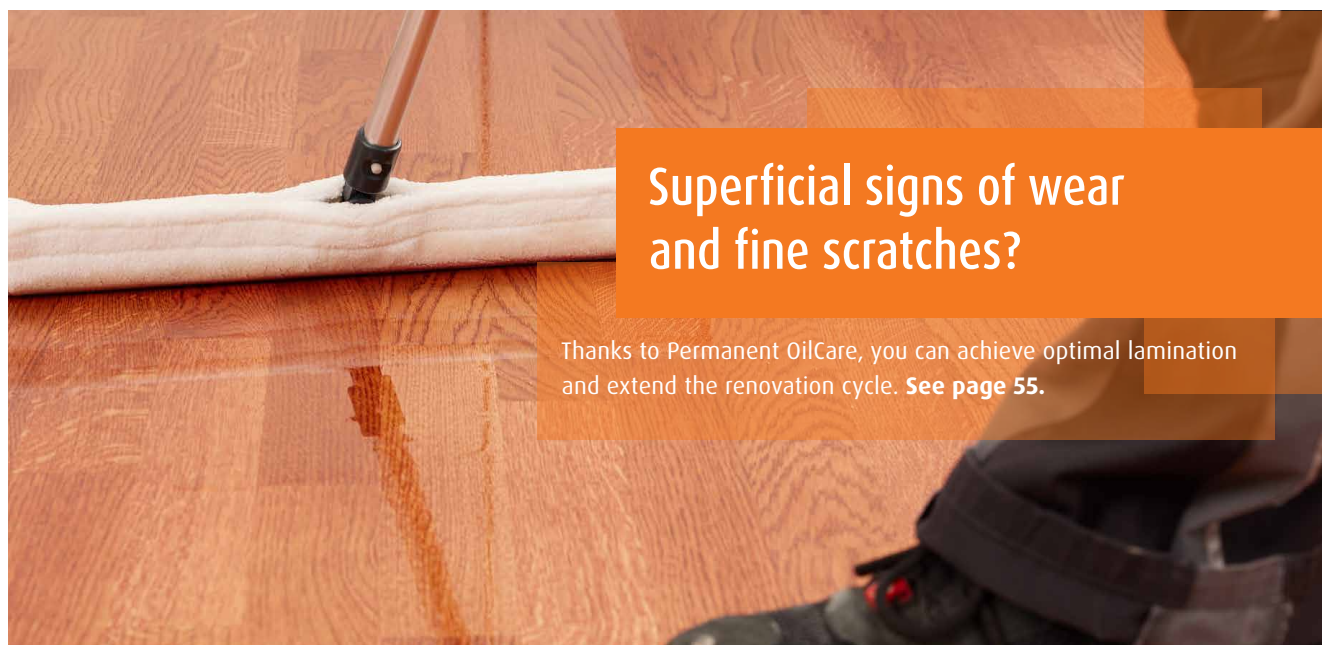
HardwaxOil EcoPlus

Solvent-free hard wax oil on natural base for wooden floors.

- Smooth and full bodied appearance
- One roller application is sufficient
- Oxime and cobalt free
- Extremely economical to use
- Easy and safe application
- Water and dirt resistant
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas
- Suitable for children's toys as per EN 71-3

| ART.-NO. | VARIANT |  |  |  | GISCODE |
|--------------|------------|---|---|---|---------|
| 10501-000000 | semi-gloss | 2.5l | 4 | 120 | Ö20+ |


| APPLICATION DEVICE | | ml/m² |
|---|--|---------|
| Trowel | | 30 - 60 |
| Microfibre 60 - 80 oil roller | | |
| Wood | | |
|     | | |
|  | | |



Superficial signs of wear and fine scratches?

Thanks to Permanent OilCare, you can achieve optimal lamination and extend the renovation cycle. **See page 55.**

Versatile color design for hardwax oil

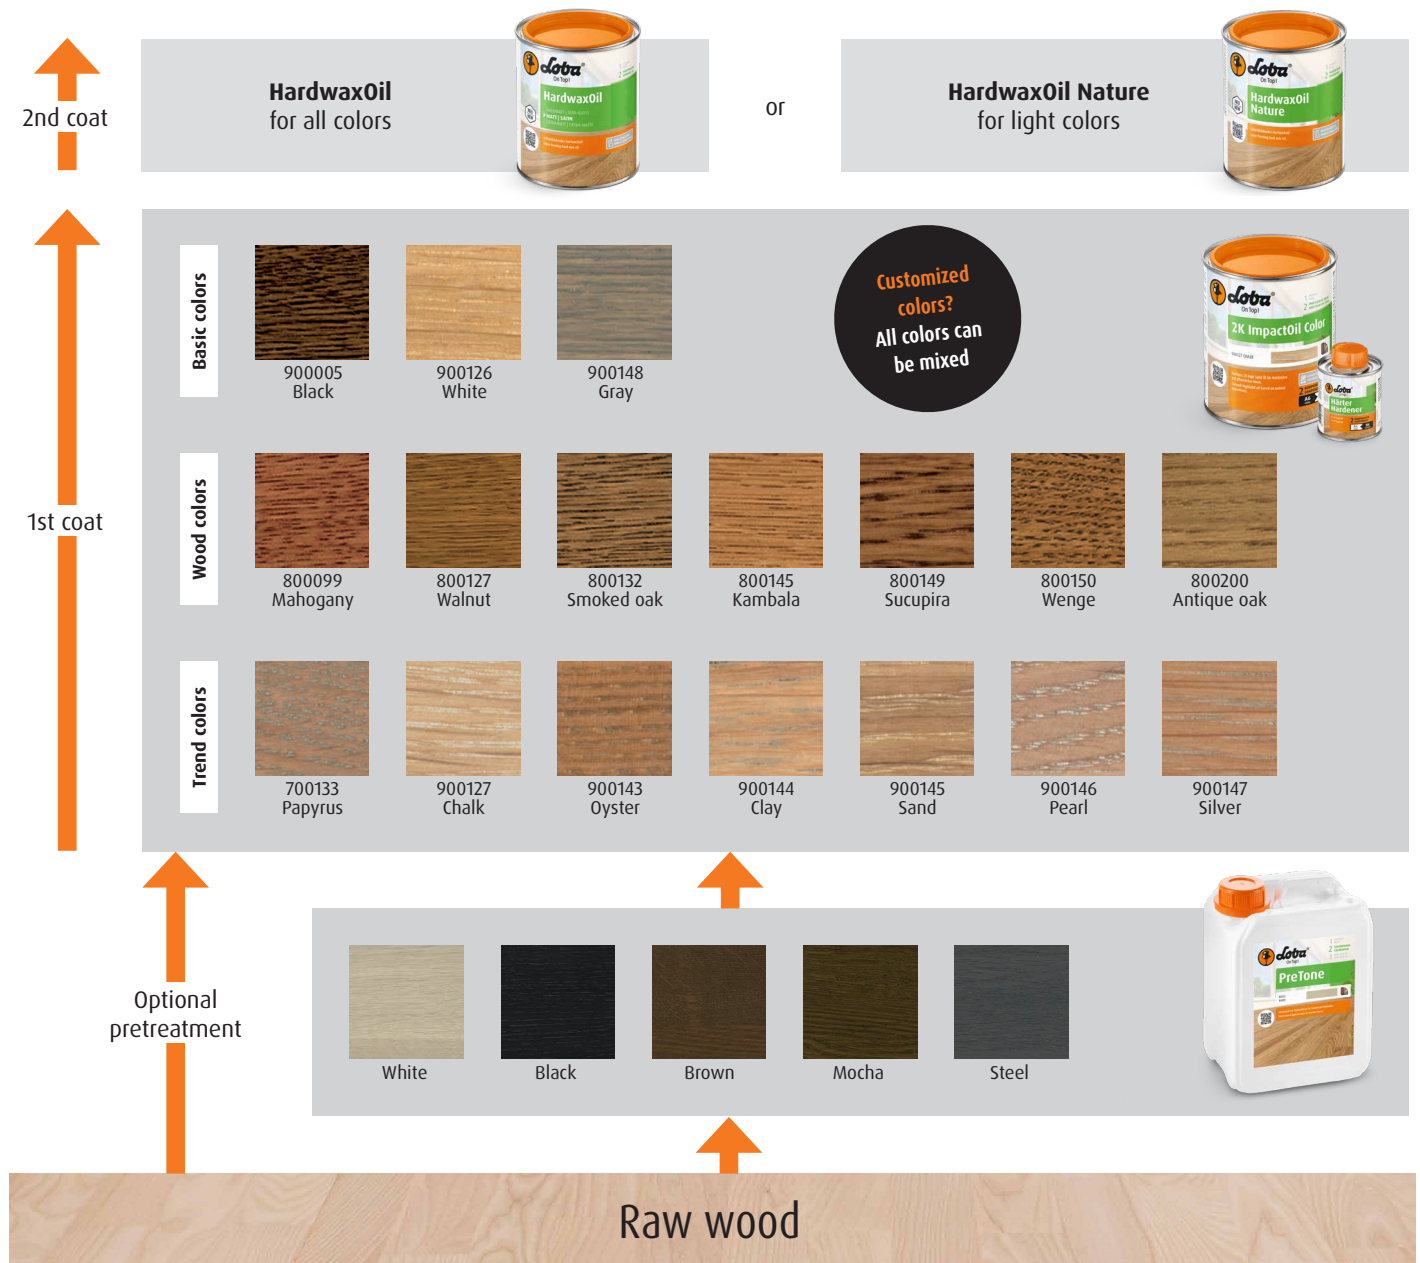

Customize your own feel-good color shades – with 17 nuances of 2K ImpactOil Color that can be mixed with each other and color intensification using PreTone

Color design | optional pretreatment and 1st coat

- See our sanding recommendations for coloration.
- Optional pretreatment with PreTone to intensify the colors.
- Apply 2K ImpactOil Color using a trowel and wait for it to penetrate.
- Approximately 20 minutes after beginning the application, smooth out using a single-disc machine and beige SpecialPad.
- Consumption per coat: approx. 30 g/m².
- Can be walked on after 12 hours, HardwaxOil can be applied after 24 hours.

Finishing | 2nd coat

- Apply HardwaxOil or HardwaxOil Nature (only on lighter colors).
- For highly absorbent surfaces, an additional coat may be required after intermediate sanding with LOBASAND GridPad fitted with a LOBASAND Hook & Loop strip to achieve full homogeneous coverage.

List of Wood Species for Oil & Wax Systems

1. European wood species

| Wood type | 2K ImpactOil | Akzent 100 Oil | HardwaxOil | HardwaxOil Nature | HardwaxOil EcoPlus |
|--------------------------------|--------------|----------------|------------|-------------------|--------------------|
| Maple | + | + | + | + | + |
| Acacia / Robinia | + | + | + | + | + |
| Acacia / steam-treated Robinia | + | + | + | ◇ | + |
| Birch | + | + | + | + | + |
| Pear tree | ◇ | ◇ | – | – | ◇ |
| Steam-treated beech | + | + | + | ◇ | + |
| Beech | + | + | + | + | + |
| Oak | + | + | + | + | + |
| Alder | + | + | + | + | + |
| Ash | + | + | + | + | + |
| Spruce | + | + | + | + | + |
| Chestnut | + | + | + | + | + |
| Pine | + | + | + | + | + |
| Cherry | + | + | + | ◇ | + |
| Larch | + | + | + | + | + |
| Walnut | + | + | + | ◇ | + |
| Olive | + | + | ◇ | ◇ | + |
| Smoked oak | + | + | + | ◇ | + |
| Elm | + | + | + | ◇ | + |

2. Exotic wood species

| | | | | | |
|----------------------------|---|---|---|---|---|
| Afrormosia | + | + | + | ◇ | + |
| Arara Vermelho | + | + | + | ◇ | + |
| Bilinga | + | + | + | + | + |
| Cabreuva | + | + | + | ◇ | + |
| Cumaru / almendrillo | + | + | + | + | + |
| Doussie / afzelia | + | + | + | ◇ | + |
| Eucalyptus / spotted gum | + | + | + | + | + |
| Eucalyptus / jarrah | + | + | – | – | + |
| Guatambu | + | + | ◇ | ◇ | + |
| Hevea | + | + | + | + | + |
| Ipe / lapacho | ◇ | ◇ | – | – | ◇ |
| Iroko / kambala | + | + | + | ◇ | + |
| Iron wood | + | + | ◇ | ◇ | + |
| Jatoba / Brazilian cherry | + | + | + | ◇ | + |
| Coconut | + | + | – | – | + |
| Kotibe | + | + | + | ◇ | + |
| Mahogany | + | + | + | ◇ | + |
| Massaranduba | + | + | ◇ | ◇ | + |
| Mecrusse | + | + | + | ◇ | + |
| Merbau | + | + | + | ◇ | + |
| Muhuhu | + | + | + | ◇ | + |
| Padouk | + | + | – | – | + |
| Panga Panga | + | + | + | ◇ | + |
| Pigua Marfin | + | + | ◇ | ◇ | + |
| Pitch pine (old floors) | + | + | + | | + |
| Hard pine (pitch pine new) | + | + | ◇ | ◇ | + |
| Purpleheart | + | + | ◇ | ◇ | + |
| Sucupira | + | + | + | ◇ | + |
| Tasmanian oak | + | + | + | + | + |
| Teak | + | + | + | ◇ | + |
| Wenge | + | + | + | ◇ | + |
| Cypress | ◇ | ◇ | ◇ | ◇ | ◇ |

3. Other substrates

| | | | | | |
|-----------------|---|---|---|---|---|
| Multiplex | + | + | ◇ | ◇ | + |
| OSB plates | ◇ | ◇ | ◇ | ◇ | ◇ |
| V100 chipboards | ◇ | ◇ | ◇ | ◇ | ◇ |

+ = Can be used without restrictions

◇ = Use may lead to problems. We recommend consulting LOBA.

– = Use not recommended

* Can be used in full structure

Cleaning and care systems for oiled/waxed flooring

Page 55



Application Tools for Oil & Wax Systems



| | | OIL ROLLER | FINISH ROLLER | | | TROWEL |
|--|--------------------------|------------------|----------------|----------------|----------------|----------------|
| | | Micro 60-80 | Micro 100-120 | Universal 100 | Deluxe 120 | Trowel |
| | | ART.-NO. 16236-1 | ART.-NO. 16236 | ART.-NO. 16233 | ART.-NO. 16234 | ART.-NO. 16083 |
| | 2K ImpactOil transparent | ✓ | – | – | – | – |
| | 2K ImpactColor | – | – | – | – | ✓ |
| | PreTone | – | ✓ | – | – | – |
| | Akzent 100 Oil | ✓ | – | – | – | ✓ |
| | HardwaxOil EcoPlus | ✓ | – | – | – | – |
| | HardwaxOil | ✓ | – | – | – | ✓ |
| | HardwaxOil Nature | ✓ | – | – | – | ✓ |

✓ = Can be used without restrictions

– = Use not recommended

*

= Observe technical information

Use our download area

- Set-up recommendations
- Technical information
- Application videos



→ www.loba.de/int_en/downloads

Consumption calculator

Your handy helper for quickly calculating how much you need can be found at www.loba.de/int_en/services and on every product page.



A great sport

Water-based finishes from LOBA for sports flooring are extremely resilient and can withstand even the toughest challenges in top-class sports. Our finishes are suitable for use in gyms and multi-purpose halls and are certified by FIBA, the international basketball federation, as material for basketball competitions, even at the international elite level.



SportFinish

1-component parquet finish for sports parquet and sports wood floors.

- Meets the coefficient of sliding friction of the European sports floor standard
- Good price/performance ratio
- Easy and safe application

| ART.-NO. | VARIANT |  |  | GISCODE |
|--------------|------------|---|---|---------|
| 11537-000001 | semi-gloss | 10 l | 60 | W2+ |

APPLICATION DEVICE

Deluxe 120 roller

Microfibre 100 - 120 roller

ml/m²

100 - 120

Wood



2K UltraSport

2-component polyurethane parquet finish for sports floors for particularly heavy-duty use.

- Meets the requirements of German and European sports flooring standards
- Extremely high scuff-mark resistance
- Easy and safe application
- Excellent wear resistance
- Meets all requirements of ÖNORM C2354:2009 for the highest stress class

| ART.-NO. | VARIANT |  |  |  | GISCODE |
|--------------|-------------|---|---|---|---------|
| 11401-900005 | extra-matte | 5 kg | 2 | 96 | W3/DD+ |
| 11401-900003 | satin | 5 kg | 2 | 96 | |

APPLICATION DEVICE

Deluxe 120 roller

Microfibre 100 - 120 roller

g/m²

100 - 120

Wood | Linoleum | PVC



1) extra-matte

The appropriate primers and finishes suitable for sports flooring.



* Semi-gloss, in combination with SportCare.




SportRemover

Deep cleaner for sports floors, pH-neutral.

- Removes old layers of care product
- Removes stubborn dirt
- pH-neutral, also suitable for linoleum floor coverings

Wood | Linoleum | PVC

| ART.-NO. |  |  | GISCODE |
|--------------|---|---|---------|
| 10078-000000 | 10 l | 60 | GG60 |




SportCleaner

Maintenance cleaning concentrate for sports floors, pH-neutral.

- Great cleaning power
- A concentrate with a very high yield, 1 l of LOBA SportCleaner makes up to 200 l of ready-to-use cleaning solution
- Material-protecting and pH-neutral
- Environmentally friendly biodegradable cleaner
- Ideal for use with cleaning machines

Water-resistant floors

| ART.-NO. |  |  | GISCODE |
|--------------|--|--|---------|
| 10178-000000 | 10 l | 60 | GU73 |





Sportbodenpflege

Care product for sports floors.

- For regular wipe care in sports halls
- Can also be machine applied
- Meets the requirements of German and European sports flooring standards
- Extremely economical concentrate

Linoleum | PVC

EN 14904

| ART.-NO. |  |  | GISCODE |
|--------------|---|---|---------|
| 10059-200000 | 10 l | 60 | GU83 |



SportCare

Water-based floor care product.

- Maintains the floor's value and appearance
- Provides long-term protection against wear
- Brings new shine to heavily used and worn floors
- Prevents scuff marks from shoe soles in the finish
- Especially safe to walk on
- Easy and safe application
- Extremely high scuff-mark resistance

Wood | Linoleum | PVC



DIN 18032

EN 14904

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|---|---|---------|
| 10055-000000 | 1 l/10 l | 12/- | 480/60 | GE20 |

SportCare with LOBA Wischwiesel


Water-based dispersion care product for finished floors. Protects finished floors against fine scratches and signs of wear with a care film. Prevents early wear and increases the surface's lifespan.

Application with the LOBA Wischwiesel is recommended.

See page 72.

Long-term protection for resilient coverings

Whether you need to finish newly laid designer or vinyl flooring or want to renovate flooring that's looking a little worn: With our water-based system for resilient floor coverings made of vinyl, PVC, LVT or linoleum, you can ensure reliable protection of the surface against dirt, liquids and wear, even in heavy-traffic areas.

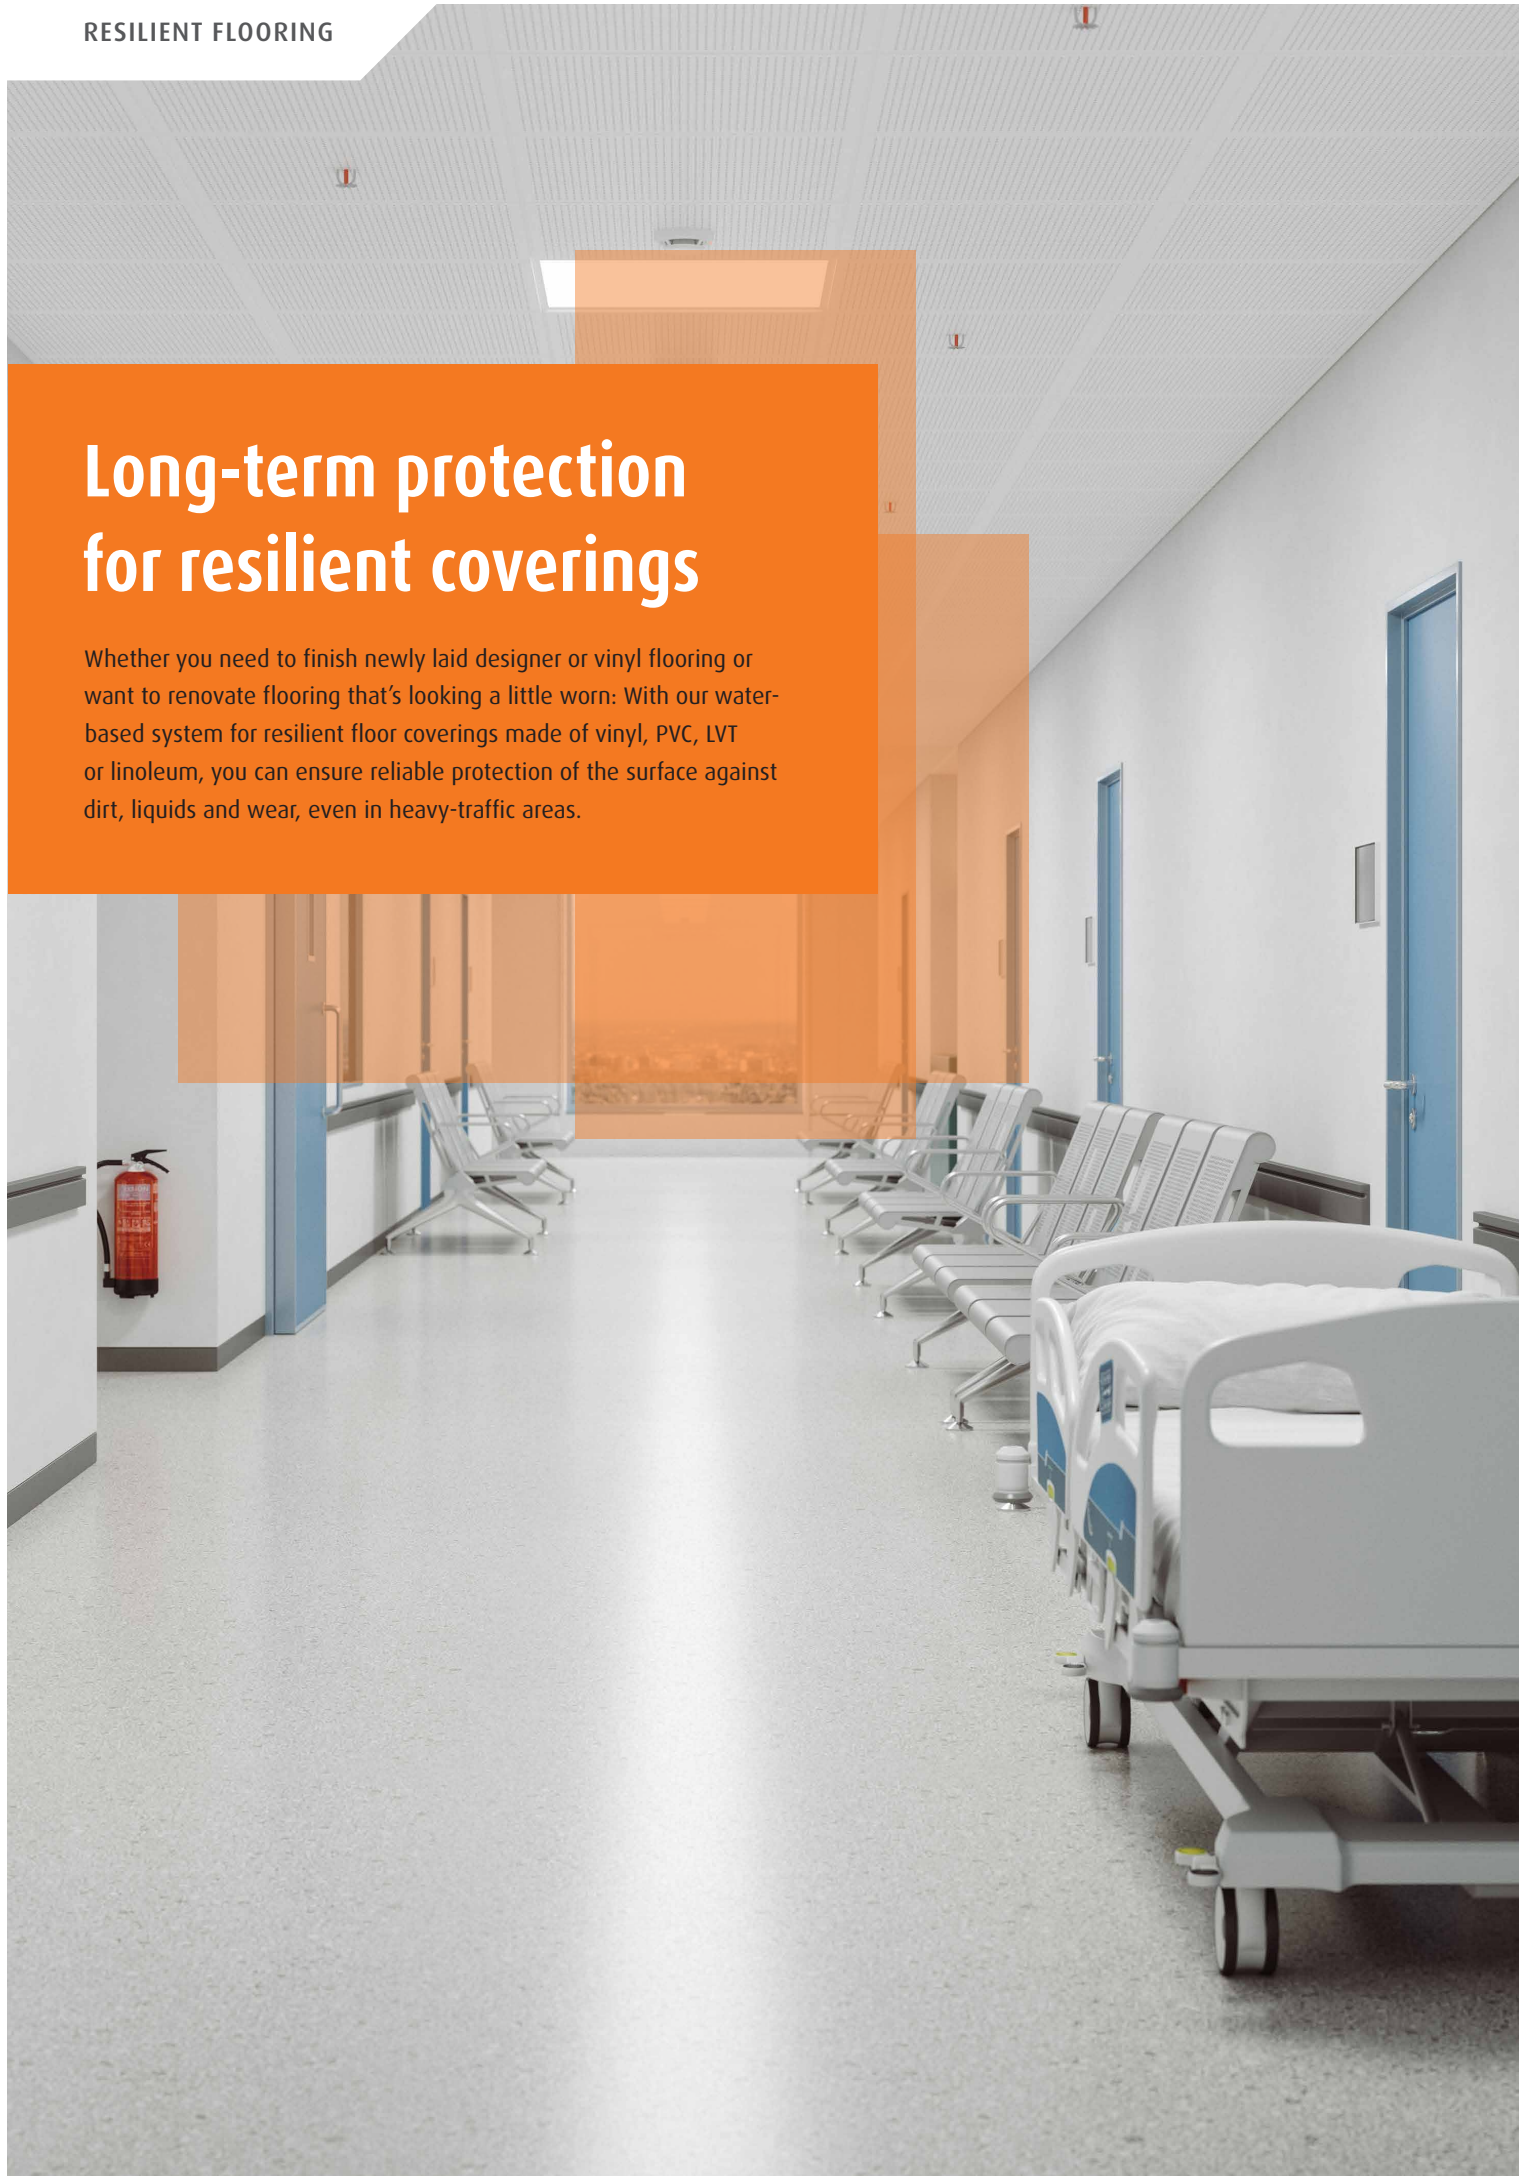



2K UltraElastic

2-component polyurethane finish for resilient floorings.

- Lap-free application
- Specially developed for renovating linoleum, PVC, CV and LVT coverings
- Reduces the cleaning effort due to reduced dirt adhesion
- Optimised joint protection safeguards the substrate
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas

APPLICATION DEVICE

Microfibre 100 - 120 roller

g/m²

60 - 80

Stress level




Linoleum | PVC



| ART.-NO. | VARIANT | | | | GISCODE |
|--------------|-------------|------|---|----|---------|
| 11043-000005 | extra-matte | 5 kg | 2 | 96 | W3/DD+ |

Tip:

Can be re-finished within 24 hours without intermediate sanding, and thereafter only with intermediate sanding. Intermediate sanding before the last application improves the final visual result. Simply use LOBASAND PerforatedPad P180 or a finer grain size; alternatively you can use LOBASAND SandingGrid P180 or a finer grain size.



Cleaning and care systems for resilient flooring

LOBA offers a wide range of cleaning products that are ideal for the effective and gentle cleaning and care of flooring such as vinyl, PVC, LVT or linoleum.

See page 51.



Industrial look made easy

Cool, individual, timeless: A minimalist industrial look can easily be created with a floor in a concrete look – with the Factory Line from LOBA. The water-based, very low-emissions system retains the natural color and visual effects of cementitious trowelled flooring and thus opens up a wide range of options for designing concrete-look floors.





FactoryBase

Primer for cement-based levelling compounds for direct use.

- Easy and safe application
- Time efficient through application in a 2-coat system (1x primer 1x finish)
- Optimizes adhesion between levelling compound and finish
- Applicable in a system with LOBA 2K FactoryStyle and numerous levelling compounds

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|---|---|---------|
| 11751-000000 | 5l | 4 | 128 | W2+ |

APPLICATION DEVICE

Microfibre 100 - 120 roller
Universal 100 roller

ml/m²

100 - 120

Trowelled floors



2K FactoryStyle

2-component polyurethane parquet finish for cementitious levelling compounds for direct use.

- Particularly low emission according to EMICODE EC1 Plus
- Uniform matt surface
- Wide range of applications also in public areas due to anti-slip R9
- Time efficient through application in a 2-coat system (1x primer 1x finish)

| ART.-NO. | VARIANT |  |  |  | GISCODE |
|--------------|-------------|---|---|---|---------|
| 11743-000094 | extra-matte | 5kg | 2 | 96 | W2/DD+ |

APPLICATION DEVICE

Microfibre 100 - 120 roller

g/m²

100

Stress level



Trowelled floors



Design and protection for wooden terraces

From thorough cleaning, finishing and oiling to maintenance – the complete system from LOBA offers perfectly coordinated products for the design, protection and care of your wooden or WPC terrace. The Deck Line is ideal for various wood species, and for both smooth and grooved planks. The treatment effectively protects against UV radiation, frost and and temporary surface moisture.



DeckPrepare

Primer for wooden decks in outdoor areas.

- Delays the weather-related graying of wood
- Strengthens the protective effect of the subsequent surface refinement
- Improves the adhesion of the subsequent coating to the substrate
- Easy and safe application
- Quick-drying
- Color- and odorless
- Environmentally friendly
- Applicable in a system with LOBA DeckFinish/Color. Optional application before impregnation with LOBA DeckOil/Color

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|---|---|---------|
| 11841-000000 | 5l | 4 | 128 | W2+ |

| APPLICATION DEVICE | | ml/m ² |
|--------------------|--|-------------------|
| Oilbrush | | 100 - 120 |
| Brush | | |


Wood



DeckFinish

1C water-based finish for exterior wooden surfaces.

- Protects against temporary surface moisture
- Emphasizes the natural wood color
- Chlorine resistant
- Easy and safe application
- No roughening of the wood
- Short drying time
- More durable than oiled surfaces
- Suitable for smooth and grooved planks
- Mixable and tintable with all color variants

| ART.-NO. | VARIANT |  |  |  | GISCODE |
|--------------|-------------|---|---|---|---------|
| 11842-000000 | Transparent | 5l | 4 | 128 | W3+ |

| APPLICATION DEVICE | | ml/m ² |
|--------------------|--|-------------------|
| Oilbrush | | 100 - 120 |
| Brush | | |

Wood



OUTDOOR



DeckFinish Color

1C water-based finish for exterior wooden surfaces.

- Protects against temporary surface moisture
- Chlorine resistant
- Easy and safe application
- No roughening of the wood
- Short drying time
- Suitable for all types of wood
- Suitable for smooth and grooved planks
- Applicable in a system with LOBA DeckPrepare


| ART.-NO. | VARIANT |  |  |  | GISCODE |
|-----------|----------------|---|---|---|---------|
| 11842-... | Various colors | 5l | 4 | 128 | W3+ |

| APPLICATION DEVICE | | ml/m ² |
|--------------------|--|-------------------|
| Oilbrush | | 100 - 120 |
| Brush | | |


Wood



Light brown



Dark brown



Red brown



Grey

Color samples are not binding



DeckOil

Oil impregnation for wooden surfaces in outdoor areas.




- Protects against temporary surface moisture
- Good penetration behaviour
- Easy and safe application
- Also suitable for impregnation of garden furniture
- Applicable on smooth and grooved planks
- The preceding use of LOBA DeckPrepare increases the durability
- Suitable for children's toys as per EN 71-3

| ART.-NO. | VARIANT |  |  |  | GISCODE |
|--------------|-------------|---|---|---|---------|
| 10616-000000 | Transparent | 750 ml/2.5l/12l | 6/4/- | 480/120/42 | Ö60+ |

APPLICATION DEVICE

| | |
|----------|-------------------|
| Oilbrush | ml/m² 80 - 120 |
| Brush | |

Wood



10-19° ≥18°



DeckOil Color

Colored oil impregnation for wooden surfaces in outdoor areas.




- Protects against temporary surface moisture
- Good penetration behaviour
- Easy and safe application
- Also suitable for impregnation of garden furniture
- Applicable on smooth and grooved planks
- The preceding use of LOBA DeckPrepare increases the durability
- Suitable for children's toys as per EN 71-3

| ART.-NO. | VARIANT |  |  |  | GISCODE |
|-----------|----------------|---|---|---|---------|
| 10616-... | Various colors | 2.5l | 4 | 120 | Ö60 |


APPLICATION DEVICE

| | |
|----------|-------------------|
| Oilbrush | ml/m² 80 - 120 |
| Brush | |


Wood




10-19° ≥18°



Light brown



Dark brown



Red brown



Grey

Color samples are not binding



DeckDegrayer

Degreaser for cleaning and refreshing wooden surfaces in outdoor areas.

- Ideal degreasing preparation for follow-up treatment
- Easy and safe application
- Can be used on horizontal and vertical surfaces and garden furniture, does not drip
- No sanding necessary
- Applicable to all wood species

Wood

| ART.-NO. | | | | GISCODE |
|--------------|------|---|-----|---------|
| 10741-000000 | 2.5l | 6 | 144 | GG10 |



DeckCleaner

Maintenance cleaner for outdoor areas.

- Can be used for maintenance and intensive cleaning
- Very productive
- Suitable for oiled and finished wood and WPC

Wood | WPC

| ART.-NO. | | | | GISCODE |
|--------------|------|---|-----|---------|
| 10731-000000 | 2.5l | 6 | 144 | GU70 |



DeckRefresh

Wipe care for cleaning and maintaining wooden surfaces in outdoor areas.

- Thorough, gentle wipe care
- Gives the surface a silky sheen
- Easy and safe application
- No remover necessary due to a self-emulsifying formula
- Suitable for oiled and finished wood surfaces in outdoor areas

Wood

| ART.-NO. | | | | GISCODE |
|--------------|------|---|-----|---------|
| 10711-000000 | 2.5l | 6 | 144 | GU40 |



WPC Refresh

Maintenance oil for outdoor areas.

- Optical upgrading for WPC and oiled wood surfaces
- Brings back the silky matte look
- Easy and safe application
- Suitable for WPC and oiled wood surfaces

Wood | WPC

| ART.-NO. | | | | GISCODE |
|--------------|----|---|-----|---------|
| 10721-000000 | 1l | 6 | 480 | Ö60+ |

Gently protect beautiful floors

LOBA thinks beyond the finishing of valuable flooring: In order to optimally protect the surface and maintain it for as long as possible, we offer top-quality care and cleaning products for professional users. With our wide range of products, you can maintain long-term value and a perfect appearance, both indoors and outdoors. Caring and cleaning with LOBA: For those who think long-term!



Cleaner

Highly-concentrated cleaner for all water-resistant surfaces, pH-neutral.

- Excellent cleaning effect thanks to superb dirt-dissolving power
- Extremely economical concentrated, 1 litre of LOBA Cleaner yields up to 200 litres of ready-to-use cleaning solution
- Material-protecting and pH-neutral
- Can be used universally for all waterproof surfaces
- Environmentally friendly biodegradable cleaner

Water-resistant surfaces

| ART.-NO. | | | | GISCODE |
|--------------|--------|------|--------|---------|
| 10175-400000 | 1l/10l | 12/- | 480/60 | GU73 |



LaminateCleaner

Ready-to-use spray cleaner for all water-resistant surfaces, pH-neutral.

- Significantly reduces the risk of swollen edges with laminate flooring
- Extremely economical concentrate
- Also suitable for plastic-coated furniture, walls, doors and windows
- Streak-free drying
- Material-protecting and pH-neutral
- Excellent cleaning effect thanks to superb dirt-dissolving power

Laminate

| ART.-NO. | | | | GISCODE |
|--------------|----|----|-----|---------|
| 10443-000000 | 1l | 12 | 480 | GU50 |

Cleaning and care systems for sports flooring

See the Sports Flooring range on page 39.






InvisibleCare

Care product for maintaining and achieving extra-matte surfaces.

- Preserves extra-matte appearance
- Suitable for adjusting the gloss level from semi-gloss to extra-matte
- Protective coating against light scratches and signs of wear
- Easy and safe application
- Conceals signs of wear and tear and enhances the appearance of floors
- Simplified cleaning due to reduced dirt adhesion

Wood | Cork | Linoleum | PVC

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|---|---|---------|
| 10492-000000 | 1l | 12 | 480 | GE10 |

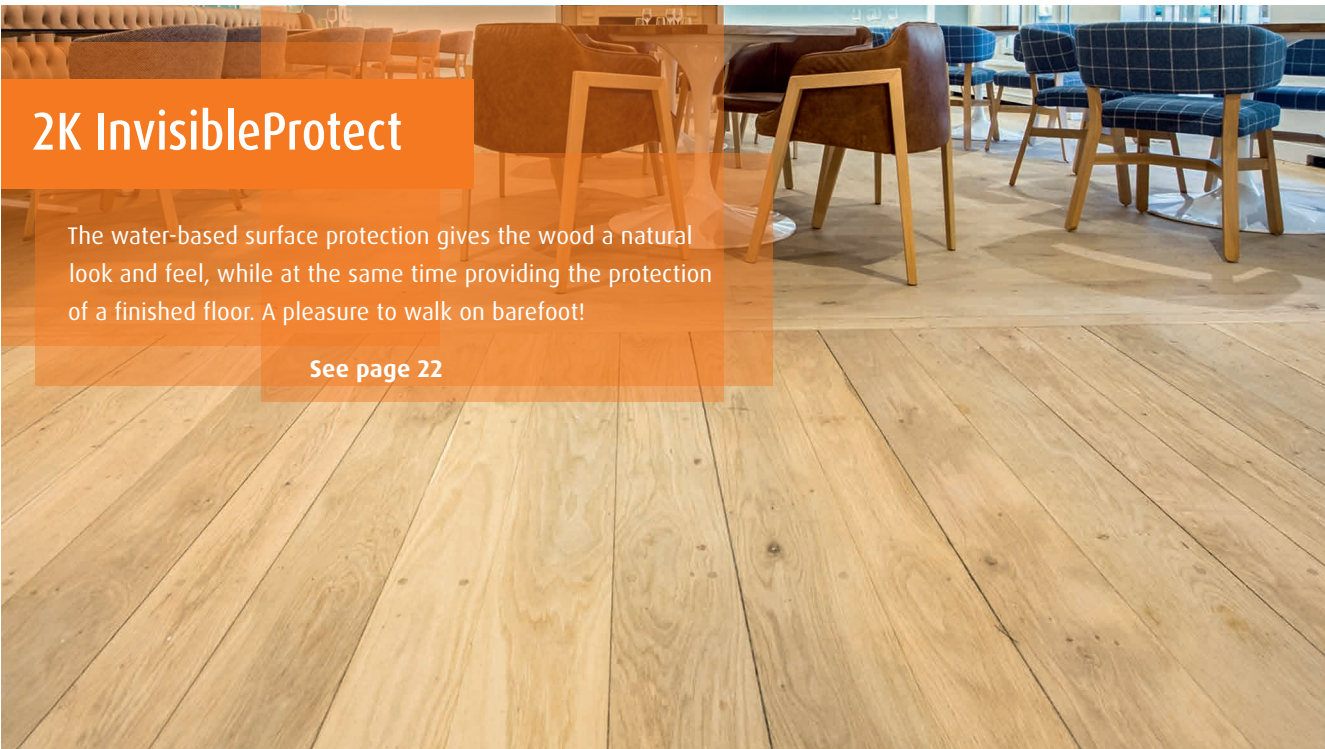

2K InvisibleProtect

The water-based surface protection gives the wood a natural look and feel, while at the same time providing the protection of a finished floor. A pleasure to walk on barefoot!

See page 22




CareRemover

Deep cleaner for finished surfaces, pH-neutral.

- Removes old layers of care product
- Removes stubborn dirt
- Can be used universally on various floors and finished hardwood
- Material-protecting and pH-neutral

Wood | Cork | Linoleum | PVC | Tile

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|---|---|---------|
| 10065-900000 | 1l/10l | 12/- | 480/60 | GG60 |






ParkettCare

Care product for finished parquet floors.

- Maintains the floor's value and appearance
- Provides long-term protection against wear
- Can be used without restriction for prefinished wood floors
- Recommended by leading industrial wood floor manufacturers
- Brings new shine to heavily used and worn floors
- Easy and safe application

Wood

| ART.-NO. | VARIANT |  |  |  | GISCODE |
|--------------|------------|---|---|---|---------|
| 10011-400003 | satin | 1l/5l | 12/4 | 480/128 | GE10 |
| 10011-400000 | silk gloss | 1l/5l/10l | 12/4/- | 480/128/60 | |






FloorCare

Care products for finished floor coverings.

- Maintains the floor's value and appearance
- Provides long-term protection against wear
- Can be used universally on various floors and finished hardwood
- Brings new shine to heavily used and worn floors
- Easy and safe application

Wood | Cork | Linoleum | PVC

| ART.-NO. | VARIANT |  |  |  | GISCODE |
|--------------|------------|---|---|---|---------|
| 10490-400003 | satin | 1l/5l | 12/4 | 480/128 | GE10 |
| 10490-400000 | silk gloss | 1l/10l | 12/- | 480/60 | GE20 |
| 10490-400180 | anti-slip | 10l | - | 60 | GE10 |






KorkCare

Care product for finished cork flooring.

- Universal care product for all finished cork flooring
- Brings new shine to heavily used and worn floors
- Easy and safe application
- Water-based and eco-friendly
- Maintains the floor's value and appearance
- Provides long-term protection against wear
- Recommended by leading manufacturers of prefabricated cork

Cork

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|---|---|---------|
| 10265-400000 | 1l | 12 | 480 | GE10 |



PermanentCare

Polyurethane permanent care product for finished surfaces.

- Particularly wear-resistant, pure PU permanent care product
- Provides long-term protection against wear
- Applies a matt shine to tired and worn floors
- Can be used universally on various floors and finished hardwood
- Extremely high scuff-mark resistance
- High solids content

Wood | Cork | Linoleum | PVC

| ART.-NO. | VARIANT | | | | GISCODE |
|--------------|---------|-------|------|---------|---------|
| 10189-200003 | satin | 1l/5l | 12/4 | 480/128 | GE10 |
| 10189-200000 | gloss | 1l/5l | 12/4 | 480/128 | |



Refresh

Wipe care product for cleaning and maintaining finished and oiled surfaces.

- Universal product for use on a variety of varnished and oiled floors
- Extremely economical concentrate
- Can also be machine applied
- Clearly visible care effect

Wood | Cork | Linoleum | PVC



DIN 18032

| ART.-NO. | | | | GISCODE |
|--------------|--------|------|--------|---------|
| 10046-200000 | 1l/10l | 12/- | 480/60 | GU40 |

Product and name changes at a glance

There have been significant changes in the range of cleaning and care products. You will find all changes here.

The following articles have been renamed

| New name | Former name |
|---------------------------------|----------------------------|
| PermanentCare | V6 Finish |
| Refresh | CareCleaner |
| WaxRefresh | WaxCleaner |
| Sportbodenpflege / SportRefresh | Sportbodenpflege / GymCare |

The following articles are new

| |
|-------------------|
| SportRemover |
| SportCleaner |
| InvisibleCare |
| Permanent OilCare |

The following articles have been optimized and renamed

| New name | Former name |
|-------------------|----------------|
| ParkettOil Deluxe | ParkettOil Pro |

NEW



Permanent OilCare


Layer-forming maintenance oil for all oiled surfaces.

- Long-lasting refreshment for hard-wearing floors
- Conceals light scratches and running lines and ensures an even surface
- Protective coating against light scratches and signs of wear
- Maintains the anti-slip properties of the floor
- Oxime and cobalt free
- Suitable for children's toys as per EN 71-3
- Safe drying

Wood | Cork



| ART.-NO. |  |  |  | GISCODE |
|--------------|---|---|---|---------|
| 10190-000000 | 1l | 6 | 480 | Ö60+ |

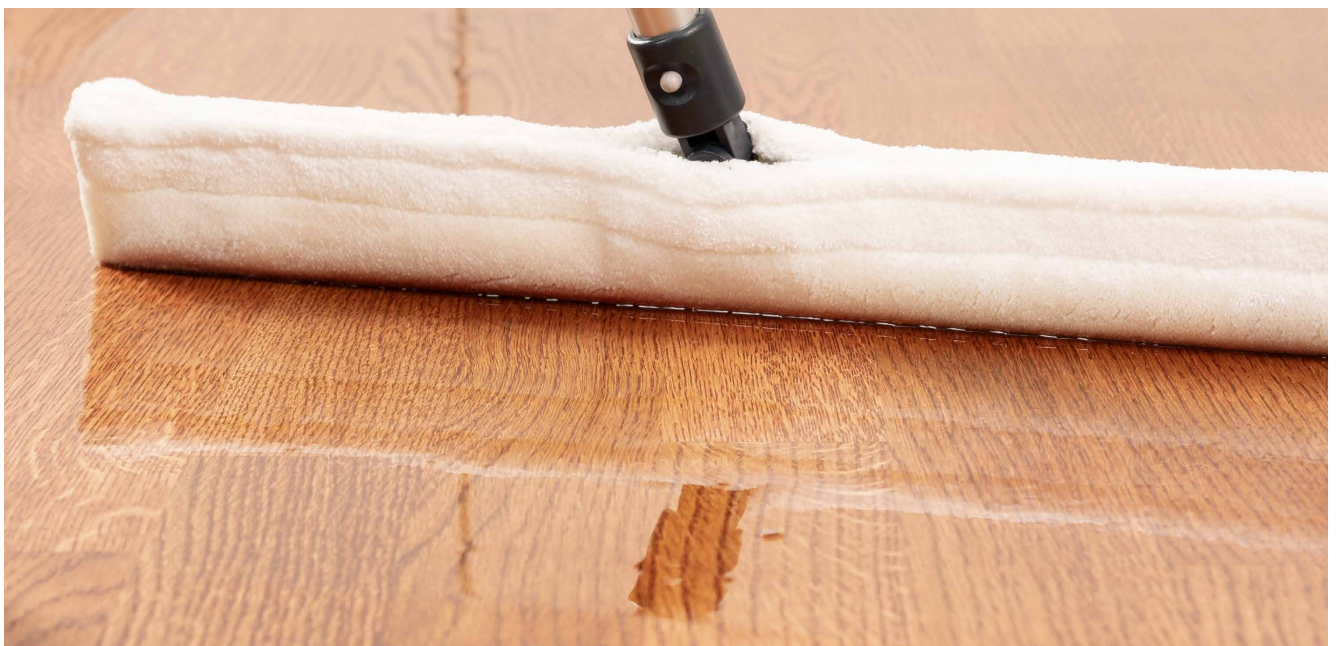



ParkettOil

Maintenance oil for non-layer-forming oil surfaces.

- Refreshes tired and worn floors
- Removes slight damage in oiled surfaces
- Ideal for full-surface care or partial improvements
- Easy and safe application
- Preserves the anti-slip properties of oiled flooring

Wood

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|---|---|---------|
| 10461-400000 | 1l/5l | 6/4 | 480/120 | Ö60+ |



ParkettOil Deluxe

Intensive care oil for re-impregnating non-layer-forming, oiled wooden floors.

- For maintenance of heavily leached, open-pored, oiled surfaces
- Ideal for full-surface care or partial improvements
- Specially for re-impregnation after intensive/deep cleaning

Wood

| ART.-NO. | VARIANT |  |  |  | GISCODE |
|--------------|-------------|---|---|---|---------|
| 10466-200000 | Transparent | 1l/5l | 6/4 | 480/120 | Ö60+ |
| 10466-200126 | White | 1l | 6 | 480 | Ö60 |






ParkettWax

Classic care wax for oiled and waxed wooden floors.

- Protects the floor against water and dirt
- Classic floor wax
- Closes open pores in the wood
- Easy to polish

Wood | Cork

| ART.-NO. | VARIANT |  |  |  | GISCODE |
|--------------|-------------|---|---|---|---------|
| 10429-400000 | Transparent | 1l/12l | 6/- | 480/50 | Ö60+ |
| 10429-480031 | Red brown | 12l | - | 50 | |



WaxRefresh

Wipe care product for cleaning and care of oiled and waxed surfaces.

- Leaves behind a thin protective wax film
- Extremely economical concentrate
- Material-protecting and pH-neutral
- Good cleaning effect
- Can be used universally on various oiled / oiled-waxed floors

Wood | Cork

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|---|---|---------|
| 10041-200000 | 10l/1l | -/12 | 60/480 | GU73 |



WaxRemover

Deep cleaner for oiled and waxed floor coverings.

- Classic intensive cleaner for oiled / waxed floors
- Also suitable for water-sensitive flooring

Wood | Cork

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|---|---|---------|
| 10309-400000 | 1l | 6 | 480 | GG0 |






ParkettSoap

Water-based soap for oiled and waxed floorings.

- Good cleaning effect
- Care effect

Wood | Cork

| ART.-NO. | VARIANT |  |  |  | GISCODE |
|--------------|-------------|---|---|---|---------|
| 10048-000000 | Transparent | 1l/5l | 12/4 | 480/128 | GU70 |
| 10048-900126 | White | 1l | 12 | 480 | |



NatureOil

Water-based maintenance oil for oiled parquet floors.

- Refreshes tired and worn floors
- Removes slight damage in oiled surfaces
- Solvent-free
- Odor neutral
- Innovation by LOBA

Wood

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|---|---|---------|
| 10100-000000 | 1l/5l | 15/4 | 540/128 | Ö10+ |




NatureWax

Water-based care wax for oiled and waxed wooden floors.

- Protects the floor against water and dirt
- Easy and safe application
- Solvent-free
- Odor neutral
- Easy to polish
- Innovation by LOBA

Wood

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|---|---|---------|
| 10105-000000 | 1l/5l | 15/4 | 540/128 | GE10 |

Cleaning and Care for the Home

Have you just beautified a private home? Everyone is satisfied, you're packing up and handing over the care instructions upon departure? That doesn't have to be the end of the business relationship! Recommend LOBA Home – for easy, gentle cleaning and care! This way, floors receive the attention they deserve, and you can continue to be there for your customers. It's that simple: with LOBA Home.





Universal Cleaner Concentrate

Universal cleaner concentrate for all water-resistant surfaces, pH-neutral.

- Ideally suited for intensive and maintenance cleaning
- Fast drying without streaks
- pH-neutral, free of solvents and plasticizers
- Biodegradable, without microplastics

Water-resistant surfaces

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|--|---|---------|
| 10023-000000 | 500 ml | 12 | 780 | GU70 |





Universal Cleaner Spray

Ready-to-use spray cleaner for all water-resistant surfaces, pH-neutral.

- Ready-to-use spray
- Fast drying without streaks
- pH-neutral, free of solvents and plasticizers
- Biodegradable, without microplastics

Water-resistant surfaces

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|--|---|---------|
| 10042-000000 | 500 ml | 12 | 780 | GU40 |



Cleaner for finished hardwood floors

Concentrate for cleaning finished wooden floors and all finished wooden surfaces, pH-neutral.

- Ideally suited for intensive and maintenance cleaning
- Fast drying without streaks
- pH-neutral, free of solvents and plasticizers
- Biodegradable, without microplastics

Finished wood floors

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|--|---|---------|
| 10021-000000 | 500 ml | 12 | 780 | GU70 |



Cleaner for oiled | waxed hardwood floors

Concentrate for cleaning oiled/waxed wooden floors and all oiled/waxed wooden surfaces, pH-neutral.

- Ideally suited for intensive and maintenance cleaning
- Fast drying without streaks
- pH-neutral, free of solvents and plasticizers
- Biodegradable, without microplastics

Oiled/waxed wood floors

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|--|---|---------|
| 10022-000000 | 500 ml | 12 | 780 | GU70 |



Care for finished hardwood floors

Concentrate for maintaining finished wooden floors and all finished wooden surfaces, pH-neutral.

- Ideally suited for intensive and maintenance care
- Fast drying without streaks
- pH-neutral, free of solvents and plasticizers
- Biodegradable, without microplastics
- Slip-resistant and sure-footed
- Prevents scuff marks caused by shoe soles

Finished wood floors

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|---|---|---------|
| 10036-000000 | 500 ml | 12 | 780 | GU40 |



Care for oiled | waxed hardwood floors

Concentrate for maintaining oiled/waxed wooden floors and all oiled/waxed wooden surfaces, pH-neutral.

- Ideally suited for intensive and maintenance care
- Fast drying without streaks
- pH-neutral, free of solvents and plasticizers
- Biodegradable, without microplastics
- Slip-resistant and sure-footed
- Prevents scuff marks caused by shoe soles

Oiled/waxed wood floors

| ART.-NO. |  |  |  | GISCODE |
|--------------|--|--|--|---------|
| 10037-000000 | 500 ml | 12 | 780 | GU40 |




Care for resilient flooring

Concentrate for maintaining resilient flooring, pH-neutral.

- Ideally suited for intensive and maintenance cleaning
- Fast drying without streaks
- pH-neutral, free of solvents and plasticizers
- Biodegradable, without microplastics
- Slip-resistant and sure-footed
- Prevents scuff marks caused by shoe soles

All design floors (PVC, vinyl, linoleum and design flooring)

| ART.-NO. |  |  |  | GISCODE |
|--------------|---|---|---|---------|
| 10038-000000 | 500 ml | 12 | 780 | GU40 |

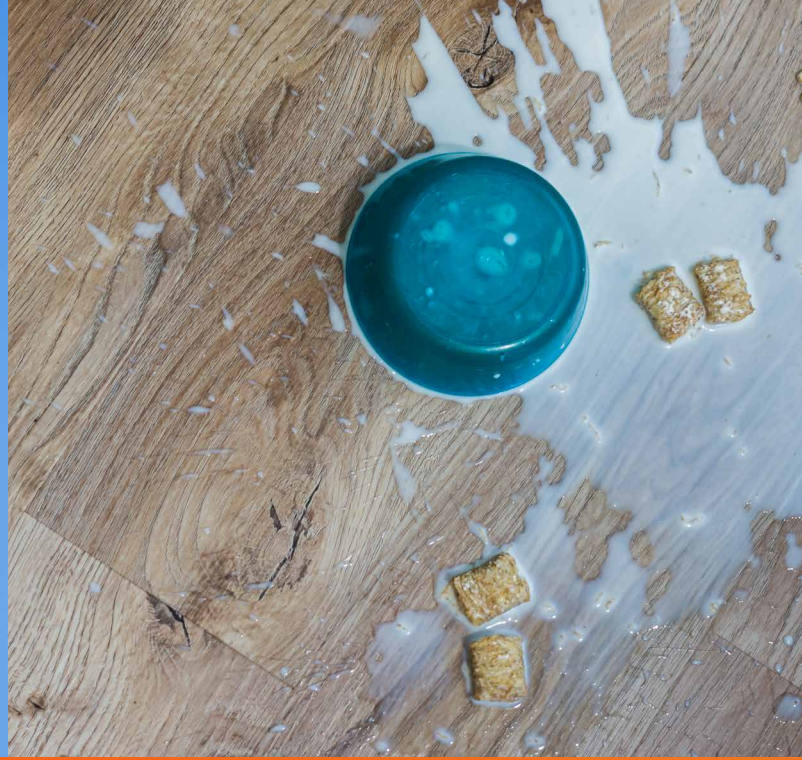

YOUR HOME OUR PASSION

Cleaning and care for home use

*Effortlessly
clean!*





Set cleaning & care for finished hardwood floors

Finished wood floors

Set for cleaning and care of finished parquet and all finished wooden surfaces, pH-neutral.

- 1x Cleaner for finished hardwood floors (concentrate) 500 ml
- 1x Care for finished hardwood floors (concentrate) 500 ml
- 1x Universal Cleaner Spray 500 ml
- 1x Cleaning & Care instruction

| ART.-NO. |  |  |  |
|--------------|---|---|---|
| 10089-100000 | 3x 500 ml | 1 | 400 |





Set cleaning & care for oiled | waxed hardwood floors

Oiled/waxed wood floors

Set for cleaning and care of oiled | waxed parquet and all oiled | waxed wooden surfaces, pH-neutral.

- 1x Cleaner for oiled | waxed hardwood floors (concentrate) 500 ml
- 1x Care for oiled | waxed hardwood floors (concentrate) 500 ml
- 1x Universal Cleaner Spray 500 ml
- 1x Cleaning & Care instruction

| ART.-NO. |  |  |  |
|--------------|---|---|---|
| 10089-200000 | 3x 500 ml | 1 | 400 |





Set cleaning & care for resilient flooring

All design floors (PVC, vinyl, linoleum and design flooring)

Set for cleaning and care of all design floors (PVC, vinyl, linoleum and design flooring).

- 1x Universal Cleaner Concentrate 500 ml
- 1x Care for resilient flooring 500 ml
- 1x Universal Cleaner Spray 500 ml
- 1x Cleaning & Care instruction

| ART.-NO. |  |  |  |
|--------------|---|---|---|
| 10089-400000 | 3x 500 ml | 1 | 400 |





Set universal cleaning for all water-resistant surfaces

Water-resistant floors

Set for cleaning all water-resistant surfaces.

- 2x Universal Cleaner Concentrate 500 ml
- 1x Universal Cleaner Spray 500 ml
- 1x Cleaning & Care instruction

| ART.-NO. |  |  |  |
|--------------|---|---|---|
| 10089-300000 | 3x 500 ml | 1 | 400 |



Spray Mop Set

Mop with integrated spray function.

- Quick and easy cleaning without a cleaning bucket
- Damp mopping - ideal for wooden floors
- Includes microfiber Mop Pad and 250 ml Refill cleaning concentrate

Water-resistant floors

| ART.-NO. | | |
|--------------|----|----|
| 16250-200000 | 12 | 96 |



Mop

Mop for application of LOBA cleaning and care products.

- Easy application of LOBA cleaning and care products
- Including high-quality microfiber mop pad (washable up to 60° C without fabric softener)

Water-resistant floors

| ART.-NO. | | |
|--------------|----|-----|
| 16244-200000 | 24 | 360 |



Spray Mop Refill

High-yield cleaning concentrate for refilling the LOBA Spray Mop.

- Easy dosing and refilling of the LOBA Spray Mop container
- Fast drying without streaks
- pH-neutral, free of solvents and plasticizers
- Biodegradable, without microplastics

Water-resistant floors

| ART.-NO. | | | | GISCODE |
|--------------|--------|----|------|---------|
| 10177-200000 | 250 ml | 12 | 2184 | GU40 |



Mop Pad

Replacement cover for LOBA Spray Mop and Mop.

- High quality microfiber mop pad (washable up to 60° C without fabric softener)
- Suitable for LOBA Spray Mop and Mop

Water-resistant surfaces

| ART.-NO. | |
|--------------|-----|
| 16253-200000 | 100 |

Premium quality abrasives and pads.






The various sanding phases of a new hardwood floor installation or renovation have a considerable influence on the final result. With our LOBASAND product range, we offer professionals a wide range of top-quality abrasives and pads. The high-performance materials and carrier technologies used guarantee effective working with all common machines for best results.



LOBA sanding recommendations: the right combination for every purpose







Standard sanding recommendation

For old and new hardwood floors

| | | |
|---------------|--|---|
| COARSE | P40 Zircon for fast removal |  |
| MEDIUM | P60 Ceramic for more effective removal with a long tool life |  |
| FINE | P100 Ceramic for an even sanding pattern |  |
| FINAL SANDING | P100/P120 PerforatedPad with DustPad to even out sanding marks around the edges and on the surface |  |
| EDGE | P40 Zircon for fast removal and P80 ceramic for more effectiveness and a fine sanding pattern |  |





High demands on the sanding result

For preparation for coloring or oiling

| | | |
|---------------|--|---|
| COARSE | P40 Zircon for fast removal |  |
| MEDIUM | P80 Ceramic for more effective removal with a long tool life |  |
| FINE | P120 Ceramic for an even sanding pattern |  |
| FINAL SANDING | P100/P120 PerforatedPad with DustPad to even out sanding marks around the edges and on the surface |  |
| EDGE | P40 Zircon for fast removal and P80 Ceramic for more effectiveness and a fine sanding pattern |  |
| | P100 Aluminum Oxide with random orbital sander |  |

Effective for property and residential construction

For sanding hardwood floor (parallel bracing) in preparation for finishing

| | | |
|---------------|---|---|
| COARSE | P50 Zircon for fast removal |  |
| MEDIUM | P80 Ceramic for more effective removal with a long tool life |  |
| FINAL SANDING | P80 PerforatedPad with DustPad |  |
| EDGE | P40 Zircon for fast removal and P80 Ceramic for more effectiveness and a fine sanding pattern |  |




Videos of sanding
recommendations



Premium | Ceramic

For the most beautiful sanding pattern and the best tool life.


- Achieves the best sanding pattern
- Very long service life
- Extreme heat resistance
- Best price-performance ratio on the market, as it is very resilient
- Suitable for all surface treatments
- For sanding UV-coated floors



| | | | Art.-no. | Dimensions | Grain size: coarse to fine | | | | | | | | | |
|---------------------------------|--|----|---------------|--------------|----------------------------|----|----|----|----|----|-----|-----|-----|-----|
| Belt | | 10 | 17107-000... | 200 x 750 mm | | 36 | 40 | 50 | 60 | 80 | 100 | 120 | | |
| | | 10 | 17103-250... | 250 x 750 mm | | 36 | 40 | 50 | 60 | 80 | 100 | 120 | | |
| Hook & Loop disc 15-hole | | 50 | 17161-150... | ø150 mm | | | 40 | | 60 | 80 | 100 | 120 | | 180 |
| Hook & Loop disc | | 50 | 17159-150... | ø150 mm | 24 | 36 | 40 | 50 | 60 | 80 | 100 | 120 | | |
| | | 50 | 17160-200... | ø200 mm | 24 | 36 | 40 | 50 | 60 | 80 | 100 | 120 | 150 | 180 |
| Hook & Loop disc Center hole | | 50 | 17160-1400... | ø140 mm | | | 40 | | 60 | | | | | |
| | | 50 | 17170-178... | ø178 mm | 24 | 36 | 40 | 50 | 60 | 80 | 100 | 120 | | |

Perfect sanding pattern with a great look!

With the LOBASAND belt, you can prepare floors perfectly for subsequent surface finishes. Whether it's a raw-wood look with 2K InvisibleProtect that you want, or an intense effect with 2K ImpactOil, LOBASAND allows you to truly bring out the natural beauty of wooden flooring.

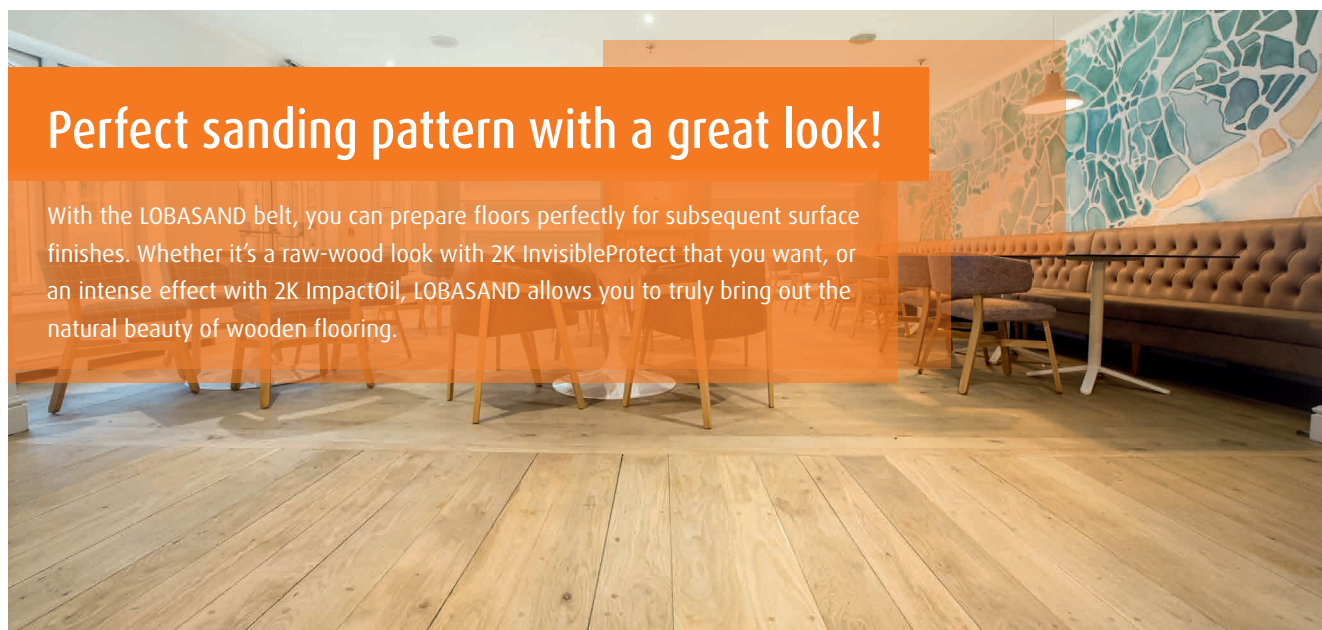

Dynamic | Zircon

For fast results and high abrasion.

- Fast removal
- Highly aggressive
- Clogs less because of half-open spreading
- Good heat resistance
- 100% zirconia, unique selling proposition on the market










| | | | Art.-no. | Dimensions | Grain size: coarse to fine | | | | | | | | |
|------------------------------|--|----|--------------|--------------|----------------------------|----|----|----|----|----|-----|-----|-----|
| Belt | | 10 | 17105-000... | 200 x 750 mm | 24 | 36 | 40 | 50 | 60 | 80 | 100 | 120 | |
| | | 10 | 17101-250... | 250 x 750 mm | | 36 | 40 | 50 | 60 | 80 | 100 | 120 | |
| Hook & Loop disc 9-hole | | 50 | 17140-125... | ø125 mm | | | 40 | | 60 | 80 | 100 | 120 | |
| Hook & Loop disc 15-hole | | 50 | 17173-150... | ø150 mm | | | 40 | | 60 | 80 | 100 | 120 | 180 |
| Hook & Loop disc | | 50 | 17112-150... | ø150 mm | 24 | 36 | 40 | | 60 | 80 | 100 | 120 | |
| | | 50 | 17112-200... | ø200 mm | | | | | 60 | 80 | 100 | 120 | |
| Hook & Loop disc Center hole | | 50 | 17112-140... | ø140 mm | | 36 | | | 60 | | 100 | 120 | |
| | | 50 | 17171-178... | ø178 mm | 24 | 36 | 40 | 50 | 60 | 80 | 100 | 120 | |

Classic | Aluminium Oxide
















For price-conscious projects.

- Leaves behind fewer visible scratches
- Low-cost price per unit
- Good for preparation for subsequent impregnation or coloring



| | |  | Art.-no. | Dimensions | Grain size: coarse to fine | | | | | | | | | |
|---------------------------------|---|---|------------------|--------------|----------------------------|----|----|----|----|----|----|-----|-----|-----|
| Belt |  | 10 | 17101-000... | 200 x 750 mm | 16 | 24 | 36 | 40 | 50 | 60 | 80 | 100 | 120 | |
| Hook & Loop disc 15-hole |  | 50 | 17142-150... | ø150 mm | | 24 | 36 | 40 | | 60 | 80 | 100 | 120 | |
| Hook & Loop disc |  | 50 | 17111-150... | ø150 mm | 16 | 24 | 36 | 40 | | 60 | 80 | 100 | 120 | |
| | | 50 | 17115-200... | ø200 mm | | | | 40 | | 60 | 80 | 100 | 120 | |
| Hook & Loop disc Center hole |  | 50 | 17110-178... | ø178 mm | 16 | 24 | 36 | 40 | | 60 | 80 | 100 | 120 | |
| Hook & Loop strip |  | 50 | 17060-000240-000 | 81 x 133 mm | | | | | | | | | | 240 |
| Triangle |  | 50 | 17041-000... | ø80 mm | | | | 40 | | 60 | 80 | 100 | | |

Other abrasives and pads

| | |  | Art.-no. | Dimensions Grain size | Range of use |
|-----------------------------------|---|---|------------------|--------------------------------------|--|
| SpecialPad beige |  | 10 | 16550-406410-000 | ø406 x 10 mm | Levelling |
| Pad for beige pad holder |  | 25 | 16550-250210-000 | 250 x 120 x 10 mm | Levelling |
| HandPadSet beige +25 pads |  | 1 | 16555-000000-000 | 85 x 135 x 10 mm | Levelling |
| SpecialPad green |  | 10 | 16550-406420-000 | ø406 x 10 mm | Throrough cleaning |
| Pad for pad holder green |  | 25 | 16550-250310-000 | 250 x 120 x 10 mm | Throrough cleaning |
| ScrubberPad black |  | 1 | 16552-406010-000 | ø406 mm | Throrough cleaning |
| NormalPad white |  | 10 | 16550-124352-000 | ø406 x 10 mm | Polishing |
| SuperPad white | | 5 | 16551-124662-000 | ø406 x 25 mm | Polishing |
| Polishing fleece |  | 10 | 16560-000000-000 | ø406 mm | Intermediate sanding |
| DustPad |  | 5 | 17039-410000-000 | ø410 mm | Dust reduction |
| PerforatedPad |  | 10 | 17037-410... | ø410 mm 80/100/120/150/180/220 | For single-disc machines (fine and intermediate sanding) |
| SandingGrid |  | 10 | 17025-406... | ø406 mm 60/80/100/120/150/180 | For single-disc machines (fine and intermediate sanding) |
| DoubleDisc |  | 10 | 17021-000... | ø406 mm 16/24/36/40/60/80/100/120 | For single-disc machines |
| Adhesive disc |  | 20 | 17010-178000-000 | ø178 mm | For circular sanding machines |
| Pad holder with telescopic bar |  | 1 | 16553-000000-000 | Extendable to 97-184 cm | Levelling and thorough cleaning |

Tools and accessories – only the best for professionals!

Since tools are effectively an “extended arm of the craftsman”, they are hugely important. You can expect the best from LOBA in this field, too: We extensively test every applicator and every tool before adding them to our range. Our uncompromising quality standards provide the certainty of being able to work easily, safely and fast in tough everyday situations on the construction site.



Roller Deluxe 120

Ensures the recommended quantity (approx. 120 g/m²). No roller frame included.

| ART.-NO. | DESCRIPTION | |
|--------------|--------------|----|
| 16234-000000 | 25 cm roller | 12 |



Roller Microfibre 100-120

For all LOBA water-based finishes as well as the primers EasyPrime and VivaPrime. Application quantity between 100-120 g/m². No roller frame included.

| ART.-NO. | DESCRIPTION | |
|--------------|--------------|----|
| 16236-000000 | 25 cm roller | 12 |



Roller Universal 100

For LOBA Rush as well as LOBA primers PrimaSeal Plus. Application quantity approx. 100 g/m². No roller frame included.

| ART.-NO. | DESCRIPTION | |
|--------------|--------------|----|
| 16233-000025 | 25 cm roller | 12 |



Oil roller Microfibre 60-80

For the roller application of oils (LOBA oils and 2K Intensive). Applied quantity: 40-60 g/m². No roller frame included.

| ART.-NO. | DESCRIPTION | |
|--------------|--------------|----|
| 16236-100000 | 25 cm roller | 12 |



Small roller for edges

Roller for edges and other hard-to-reach areas.

| ART.-NO. | DESCRIPTION | |
|--------------|--------------|----|
| 16237-000000 | 10 cm roller | 10 |



Roller frame, roller extension

Roller frame: for finish rollers.
Telescopic bar: roller extension. Can be extended up to 2 metres.

| ART.-NO. | DESCRIPTION | |
|--------------|--------------------------------------|----|
| 16232-000000 | Roller frame for 25 cm roller | 20 |
| 16232-100000 | Roller frame for 10 cm edge roller | 20 |
| 16238-000000 | Telescopic bar expandable 117-200 cm | 10 |



Rollerbox

Clean storage of rollers.

| ART.-NO. | DIMENSIONS | |
|--------------|------------|----|
| 16340-000000 | 25 cm | 50 |



Oil brush

Applicator for certain LOBA products for outdoor areas.

| ART.-NO. | DIMENSIONS | |
|--------------|------------|---|
| 16081-000021 | 21 cm | 1 |



Brush with long handle

Brushes for corners, edges and other hard-to-reach areas.


| ART.-NO. | DIMENSIONS | |
|--------------|------------|----|
| 16239-000000 | 60 mm | 12 |



Trowel

Applicator for filler products, oils, waxes, coloring systems and primers.

| ART.-NO. | DESCRIPTION | DIMENSIONS | |
|--------------|-----------------|------------|---|
| 16083-000027 | stainless steel | 27 cm | 6 |
| 16083-000035 | stainless steel | 35 cm | 6 |



TrimPad applicator

Applicator for 2K Contact and WPC Refresh.

| ART.-NO. | DESCRIPTION | DIMENSIONS | |
|--------------|------------------------|------------|----|
| 16274-000010 | Spare TrimPad | 25 cm | 12 |
| 16275-000000 | Telescopic bar TrimPad | - | 10 |
| 16273-000010 | TrimPad Applicator | 25 cm | 12 |



Wischwiesel

Applicator with pad for water-based LOBA maintenance products. The LOBA applicator pad is a high-quality applicator head for the LOBA Wischwiesel.

| ART.-NO. | DESCRIPTION | DIMENSIONS | |
|--------------|----------------|------------|-----|
| 16247-000000 | Applicator | 140 cm | 20 |
| 16249-000000 | Applicator pad | 44 cm | 100 |

Range of Use – Rollers



| | | OIL ROLLER | FINISH ROLLER | | |
|--|--------------------------|------------------|-----------------|----------------|----------------|
| | | Micro 60 – 80 | Micro 100 – 120 | Universal 100 | Deluxe 120 |
| | | ART.-NO. 16236-1 | ART.-NO. 16236 | ART.-NO. 16233 | ART.-NO. 16234 |
| | EasyPrime | – | ✓ | ✓ | – |
| | VivaPrime | – | ✓ | ✓ | – |
| | PrimaSeal Plus | – | – | ✓ | – |
| | 2K Intensive | ✓ | – | – | – |
| | ProColor | ✓* | – | – | – |
| | FactoryBase | – | ✓ | ✓ | – |
| | EasyFinish | – | ✓ | – | ✓ |
| | EasyFinish Neo | – | ✓ | – | ✓ |
| | Speed | – | – | – | ✓ |
| | Viva | – | ✓ | – | ✓ |
| | Life | – | ✓ | – | ✓ |
| | 2K InvisibleProtect | – | – | – | ✓ |
| | 2K Supra A.T. | – | ✓ | – | ✓ |
| | 2K Duo | – | ✓ | – | ✓ |
| | 2K Fusion | – | ✓ | – | ✓ |
| | 2K UltraElastic | – | ✓ | – | ✓ |
| | SportFinish | – | ✓ | – | ✓ |
| | 2K UltraSport | – | ✓ | – | ✓ |
| | 2K FactoryStyle | – | ✓ | – | – |
| | Rush | – | – | ✓ | – |
| | 2K ImpactOil transparent | ✓ | – | – | – |
| | PreTone | – | ✓ | – | – |
| | Akzent 100 Oil | ✓ | – | – | – |
| | HardwaxOil EcoPlus | ✓ | – | – | – |
| | HardwaxOil | ✓ | – | – | – |
| | HardwaxOil Nature | ✓ | – | – | – |

✓ = Can be used without restrictions
 – = Use not recommended
 * = Observe technical information



Cover 400 g

Protection covers with vapor diffusion capability made of recycled textiles (50%) and recycled paper (50%). Protection covers for newly finished or oiled wooden floors.

| ART.-NO. | DIMENSIONS | |
|--------------|----------------|---|
| 16280-000000 | W 100cm, L 50m | 1 |



Dosing pump

Dosing pump for 10 L containers. The dosing cap extracts approx. 30 ml per push.

| ART.-NO. | DESCRIPTION | |
|--------------|---|----|
| 16225-000000 | Depth of immersion: approx. 28,5 cm - wreath: ø 4,5 cm | 25 |



Mixing container

Measuring cup with scale for the measurement of partial quantities of LOBA 2K water-based finish or LOBA 2K Intensive.

| ART.-NO. | DESCRIPTION | |
|--------------|--------------------------------------|---|
| 16080-000000 | For 2K sealers filling quantity 1l | 1 |
| 16080-100000 | For 2K Intensive filling quantity 1l | 1 |



Paint mixer

For the fast and mechanical stirring of colors or the mixing-in of hardening components.

| ART.-NO. | DIMENSIONS | |
|--------------|---------------------|----|
| 16254-000000 | ø 60, length 350 mm | 10 |



ShoeGaloshes

Made of fabric. 10 pairs in a clap pack. Absorbent and anti-slip. To be put on during final inspections, site inspections, oiling parquet flooring, cleaning flooring, etc.

| ART.-NO. | |
|--------------|----|
| 16422-001196 | 10 |



Spray can

Simple application of cleaning and maintenance products.

| ART.-NO. | DESCRIPTION | |
|--------------|---------------------|---|
| 16310-000000 | filling quantity 1l | 1 |



Coating bucket, bucket liner

Bucket with lid and measuring scale. PE liners for the coating bucket.

| ART.-NO. | DESCRIPTION | |
|--------------|-----------------------------|----|
| 16099-000000 | Bucket filling quantity 18l | 1 |
| 16218-000000 | Bucket liner | 25 |



Wiping cloth


Ideally suited to wipe up excess material after oil application. Highly absorbent cloth with long lifetime. The product can also be used for cleaning tools and machines.

| ART.-NO. |  |  |
|--------------|---|---|
| 16421-100000 | 10 | 1000 |



Thermo-hygrometer

For measuring ambient temperature and relative humidity.

| ART.-NO. |  |
|--------------|---|
| 16230-200000 | 1 |



Canister opener

Convenient tool for opening LOBA canisters. Especially helpful for opened canisters.

| ART.-NO. |  |
|--------------|---|
| 16219-000000 | 1 |



GapFiller


| ART.-NO. | VARIANT | | | GISCODE |
|-----------|----------------|--------|----|---------|
| 16227-... | Various colors | 310 ml | 12 | D1 |




Maple




Beech



Oak




Light oak




Grey



Mahogany



Silver



Walnut



White

Color samples are not binding



Cork stripes

| ART.-NO. | DESCRIPTION | DIMENSIONS | |
|--------------|-------------|--|----------|
| 16043-290010 | mocca | 915 x 10 x 22 mm | 36 |
| 16042-291510 | nature | 915 x 10 x 10 mm 915 x 10 x 14 mm 915 x 10 x 22 mm | 80/60/36 |



RepairSet

| ART.-NO. | VARIANT | |
|--------------|----------------|---|
| 16351-000000 | Various colors | 1 |



Workshops and trainings

Through numerous trainings conducted at our company headquarters, or in your region, we will enable you to make the very best use of our products. With LOBA, you have a reliable partner by your side who will help you inspire your customers and boost your success as a flooring specialist or interior designer.



PLEASE FIND OUR
TRAINING DATES HERE.
BOOK YOUR SEMINAR
TODAY!

Our stress levels at a glance

The new stress levels defined by LOBA help you find the perfect finish for the types of stress your project will be exposed to.

Our teams in the Application Technology and Research & Development departments continuously test LOBA products in order to ensure consistent quality and develop our products further on the basis of new requirements defined by our customers as well as laws and regulations. The tests are extremely comprehensive and examine numerous properties.


Four test categories were chosen that most strongly represent the overall resistance of the finishes:

- Single scratch
- Abrasion
- Wear
- Chemical resistance

1K and 2K finishes are evaluated on the basis of laboratory values in the respective categories on a scale of 1 – 10, and a mean value is also calculated from this.

| | 2K Duo |
|---------------------|----------|
| Single scratch | 9 |
| Abrasion | 10 |
| Wear | 9 |
| Chemical resistance | 9 |
| Mean value | 9.3 -> 9 |

Calculation example using 2K Duo



As shown on the product



Explanation of symbols



EMI CODE® EC1 PLUS:
Very low emissions



Suitable for children's toys
according to DIN EN 71-3



Connected Systems: System guarantee for LOBA sealing products and oils for Wakol adhesive and levelling compounds



Non-slip according to DIN 51097 evaluation group A



EMICODE® EC1:
Very low emissions



Emissions-tested
construction product, Class M1



Emission-tested construction
product according to French
VOC regulation



Non-slip according to DIN 51097 evaluation group B



EMICODE® EC2:
Low emissions



Emissions-tested
Construction product compliant
with DIBt principles



Eco-friendly and
low-VOC product



Non-slip according
to DIN 51130
evaluation group R9



Non-slip according
to DIN 51130
evaluation group R10



Non-slip according
to DIN 51130
evaluation group R11



Consumption in liters



Container size



Pallet unit



Consumption in grams



Packaging unit

| | | |
|----------------|---|---|
| W1 | Water-soluble surface treatment agents, solvent-free | 4 |
| W2+ | Water-soluble surface treatment agents, solvent content up to 5%, N-methylpyrrolidone-free | 4 |
| W2/DD+ | Water seal with hardener containing isocyanate, solvent content up to 5%, N-methylpyrrolidone-free | 4 |
| W3+ | Water seal, solvent content up to 15%, N-methylpyrrolidone-free | 2 |
| W3/DD+ | Water seal with hardener containing isocyanate, solvent content up to 15%, N-methylpyrrolidone-free | 2 |
| Ö10+ | Oils / waxes, solvent-free, butanonoxime-free | 4 |
| Ö10/DD+ | Oils / waxes, solvent-free, oxime-free, with hardener containing isocyanate | 4 |
| Ö20+ | Oils / waxes, low-solvent, de-aromatized, oxime-free | 2 |
| Ö40+ | Oils / waxes, contains solvents, de-aromatized, oxime-free | 1 |
| Ö40/DD+ | Oils / waxes, contains solvents, de-aromatized, oxime-free, with hardener containing isocyanate | 1 |
| Ö60 | Oils / waxes, containing high amounts of solvent (> 15%), de-aromatized | - |
| GE10 | Emulsions / dispersions (contain surfactants) | |
| GE20 | Emulsions / dispersions, contains solvents (5% - 15%) | |
| GG0 | Basic cleaner, other | |
| GG10 | Basic cleaner, solvent-free, not labelled | |
| GG60 | Basic cleaner, irritant, contains solvents, with H-substances (aminoethanol, butyl glycol, ethanediol, N-methylpyrrolidone) | |
| GG80 | Basic cleaner, caustic, contains solvents | |
| GU40 | Maintenance cleaner, solvent-free (contains surfactants) | |
| GU50 | Maintenance cleaner, contains solvents without H-substances | |
| GU70 | Maintenance cleaner, solvent-free, irritant | |
| GU73 | Maintenance cleaner, solvent-free, irritant (including severe eye damage) | |
| GU83 | Maintenance cleaner, contains solvents, irritant (including severe eye damage) | |
| G1 | Basic sealant and wood putty with high solvent content, de-aromatized and free of substances with a low boiling point (solvent content > 15%) | |
| G2 | Basic sealant and wood putty with high solvent content, de-aromatized and containing substances with a low boiling point (solvent content >15%) | |

* The DGNB certification for sustainable buildings rates our products using the criterion ENVI.2 Local Environment Impact. Quality level 4 is the highest that can be achieved.


Website features

CONSUMPTION CALCULATOR

Don't worry about the right order quantity – we'll take care of it. Enter the specifications and we'll tell you how much you need for your project!

INSPIRATION & APPLICATION

Are demanding customers or specific tenders posing a challenge for you? You'll find ideas and background information here.

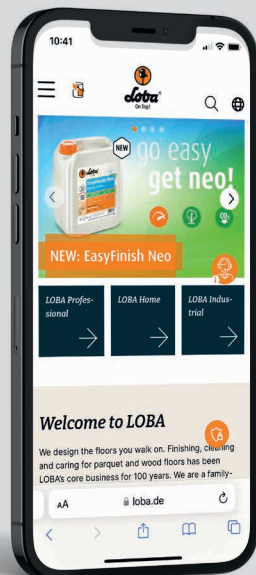

LOBA Flooring Award

SHOW US YOUR MOST BEAUTIFUL FLOORS

We warmly invite you to participate in the LOBA Flooring Award 2025! Starting on January 1 2025, we will be looking for the most impressive wood flooring projects in commercial and public areas worldwide. The winners can look forward to fantastic prizes that will reward their hard work!



LOBA GmbH & Co. KG
Leonberger Strasse 56-62
71254 Ditzingen Germany
service@loba.de
www.loba.de

Find your LOBA contact:



This catalog was printed
on paper from sustainable
forestry with inks based
on organic oil.



Mitglied der
DGNB
Deutsche Gesellschaft für Nachhaltiges Bauen
German Sustainable Building Council

