



PRODUCTS 2025

LOBA – Your partner for surface finishing and care





Excellent! Sustainability at LOBA

When it comes to sustainability, LOBA solutions are the perfect companion for every step of the process – not just for new-builds, but also for refurbishment projects.

REFURBISH INSTEAD OF USING NEW

Convince your customers to give hardwood flooring a second chance! Old flooring, when restored to a high standard, is often a beautiful alternative to new flooring. It also tells a story, and often turns out to be the more economical solution. By far, however, it's the more sustainable option: Renovating a hardwood floor conserves resources and is environmentally friendly. It also avoids waste and produces less CO₂ than a complete replacement.

PRODUCTS INSPIRED BY SUSTAINABILITY

As part of our traditional role as a pioneer in the development of water-based 2K finishes, sustainable formulas can be found throughout the range of LOBA finishing products.

SUSTAINABLE AND FAIR: OUR DELIVERY PROCESSES

To make sure our suppliers meet our rigorous standards, they agree to our code of conduct, which requires them to understand, follow, and champion our values and principles in environmental protection, social responsibility, and governance. As part of this commitment, we have dedicated ourselves to the United Nations' Sustainable Development Goals.

OUR MISSION

For us at LOBA Wakol North America, our effort focuses on consistently providing a safe, healthy atmosphere for our customers and our employees. We are dedicated to identifying the best processes, products, and packaging, which reduce our carbon footprint and creates a positive environmental impact for all of us now and for future generations. We are a proud member of the U.S. Green Building Council and Green Business Bureau. We will continue to strive each day for a better tomorrow.

LOBA GmbH & Co. KG is ISO-certified



LOBA Wakol North America is member of



Contents

HARDWOOD FLOORS

Joint Fillers	3
Sealers and Coloration	3-4
Special Products	4
1K Finishes	5-6
UV Finish	6
2K Finishes	7
Additives	8
Oils	9-10
List of Wood Species for Sealers & Finish Systems	21
List of Wood Species for Oil Systems	22

OUTDOORS

Oils	15
Cleaning & Care	16

CLEANING & CARE

Oiled Floors	11
Finished Floors	12

HOME

Cleaning & Care for the Home	13-14
------------------------------	-------

ABRASIVES & PADS

Ceramic	17
Zirconia	17
Aluminum Oxide	18
Other Abrasives & Pads	18

TOOLS & ACCESSORIES

Application Tools	19-20
Range of Use – Rollers	22

Discover the LOBA WAKOL App for North America

Always On-Site.
Find answers to
your everyday
questions quickly.



Play Store



App Store

Use our download area:

- Set-up recommendations
- Technical information
- Application videos



→ www.loba.de/us_en/downloads



@lobawakolnorthamerica



lobawakolnorthamerica



@loba-wakol

www.loba-wakol.com



EasyFill

Fast drying water-based binder designed to be mixed with fine wood dust to create a customized wood filler with high filling capacity.

- Excellent coverage
- Fast drying
- No offensive odor
- Easy application
- Suitable for all types of wood

APPLICATION DEVICE	sq ft / gal
Trowel	500 - 800

Wood



ITEM-#			
LO-FI-261	1 gal.	4	200






Stain

Fastest drying stain on the market for hardwood flooring.

- 1 HOUR DRY TIME (all colors)
- Guaranteed adhesion with LOBA water-based finishes
- Easy application and touch-ups
- No lap marks / No double staining
- No lingering odor
- Low VOC Emissions - CDPH v 1.2 - lower than requirements (96 ug/m²/hr)
- Consistent coloration
- Mix together to create custom colors
- Not self-combustible


APPLICATION DEVICE	sq ft / qt
Cloth	150 - 250
Normal pad with buffer	

Wood


ITEM-#	VARIANT				US REGULATORY VOC
LO-FI-...	Various Colors	1 qt.	6	648	740 - 832 g/l




LO-FI-034
Neutral




LO-FI-036
Ebony




LO-FI-038
Jacobean




LO-FI-041
Provincial




LO-FI-042
Mahogany




LO-FI-043
Sedona Red




LO-FI-045
Country
White




LO-FI-046
Walnut




LO-FI-198
Golden Oak




LO-FI-200
Classic Grey




LO-FI-201
Gunstock




LO-FI-202
Weathered
Oak




LO-FI-364
Nutmeg




LO-FI-365
Special
Walnut




LO-FI-366
Medium
Brown




LO-FI-367
English
Chestnut



LO-FI-368
Dark Walnut




LO-FI-369
Dark Grey



LO-FI-370
Heritage
Brown



LO-FI-371
Fruitwood



LO-FI-372
Spice Brown


Illustration colors are non-binding



EasyPrime

Clear water-based sealer for hardwood flooring, suitable for almost all wood species.

- No lap marks
- Reduces the tendency of side bonding and white line-effect
- Can be finished with all LOBA water-based finishes
- Suitable for almost all wood species
- Enhances color of LOBA Stains
- Excellent coverage rate

ITEM-#				US REGULATORY VOC
LO-FI-015	1 gal.	4	200	< 188 g/l

APPLICATION DEVICE	sq ft / gal
Micro 120 Roller	400 - 500
T-Bar	




Wood



AmberPrime

Amber toned water-based sealer to enhance colors of LOBA Stain or provide a light ambered tone for natural wood.

- Easy application
- Reduces the tendency of side bonding and white line-effect
- Enhances color of LOBA Stains

ITEM-#				US REGULATORY VOC
LO-FI-421	1 gal.	4	200	< 168 g/l

APPLICATION DEVICE	sq ft / gal
Micro 120 Roller	400 - 500
T-Bar	



Wood



2K Intensive

Strong ambering 2-component natural oil-based sealer for hardwood flooring, suitable for almost all wood species.

- Adds warmth and rich color to wood flooring
- No grain raise
- Combination of an oiled look with the advantages of a sealed surface
- Easy application
- Quick-drying oils allow finishing after 12 hours
- Water-free and low VOC

ITEM-#	VARIANT				US REGULATORY VOC
LO-FI-239	Transparent	2.5 kg	4	120	< 69 g/l

APPLICATION DEVICE	sq ft / 2.5 kg
Micro 60 - 80 Roller	540




Wood



2K Contact

2-component water-based adhesion promoter for refinishing UV cured oxide containing factory finished hardwood and cork floors without intermediate sanding.

- No sanding necessary - no dust
- The safest way to recoat textured, hand scraped, and distressed surfaces
- Very high coverage

ITEM-#				US REGULATORY VOC
LO-FI-008	1 qt.	4	360	< 240 g/l

APPLICATION DEVICE	sq ft / qt
Micro 60 - 80 Roller	500 - 600


Wood | Cork



Life


Self-sealing 1-component water-based finish for normal wear for hardwood flooring.

- Good price/performance ratio
- Balanced properties
- Excellent build
- Easy and safe application
- Suitable for all light colored North American wood species.

ITEM-#	VARIANT			US REGULATORY VOC
LO-FI-328	satin	2.5 gal.	75	< 168 g/l
LO-FI-329	semi-gloss	2.5 gal.	75	< 171 g/l

APPLICATION DEVICE		sq ft / 2.5 gal
Micro 120 Roller	1250 - 1500	
T-Bar		


Stress




1 2 3 4 5 6 7 8 9 10

Living area Commercial Extreme


Wood



UL
Underwriters Laboratories Inc.
Safety • Quality • Reliability
ASTM • ISO 9001 • ISO 14001
ULC • ENEC



EMICODE
EC1
LOW EMISSION






CONNECTED
SYSTEMS



Viva

1-component water-based finish for normal to heavy traffic in residential and light commercial applications for hardwood flooring.

- Excellent chemical and abrasion resistance
- Very good resistance to scuffing
- Powerful resistance to plasticizer migration from wood flooring adhesives
- Easy to use, no foaming or lap marks
- Non-yellowing
- Fully cured after 5 days
- Low in emission, awarded the EMICODE® EC1 label
- Full "Connected Systems" approval

ITEM-#	VARIANT				US REGULATORY VOC
LO-FI-288	semi-gloss	1 gal.	4	200	< 160 g/l
LO-FI-289	satin	1 gal.	4	200	< 160 g/l

APPLICATION DEVICE		sq ft / gal
Micro 120 Roller		500 - 600
T-Bar		

Stress

1

2

3

4

5

6

7

8

9


10

Living area


Commercial

Extreme


Wood



UL
Listed for use in
residential applications
with 100-year
life expectancy



EMICODE
EC1
Very low emissions






Connected
SYSTEMS



Hybrid

1-Component oil-modified water-based polyurethane finish for hardwood flooring.

- Outstanding durability and chemical resistance
- Astonishing color
- Superior leveling, easy to use
- Application without primer
- No side bonding
- No white lines
- Optimally suited for exotic wood species
- Exceptional scratch resistance

ITEM-#	VARIANT				US REGULATORY VOC
LO-FI-057	semi-gloss	1 gal.	4	200	< 86 g/l
LO-FI-067	satin	1 gal.	4	200	< 86 g/l

APPLICATION DEVICE		sq ft / gal
Micro 120 Roller	500 - 600	
T-Bar		

Stress

1

2

3

4

5

6

7

8

9


10

Living area

Commercial

Extreme

Wood






AMERICAN
CONNECTED
SYSTEMS







EasyFinish

1-component water-based finish with 2-component performance for hardwood flooring in high traffic areas.

- Water-based polyurethane-acrylate formula with excellent wear resistance
- No mixing - no pot life - no waste
- Excellent build through high solid content
- Easy to use, no foaming or lap marks
- Non-yellowing

ITEM-#	VARIANT				US REGULATORY VOC
LO-FI-012	satin	1 gal.	4	200	< 232 g/l
LO-FI-014	semi-gloss	1 gal.	4	200	< 205 g/l
LO-FI-011	gloss	1 gal.	4	200	< 248 g/l



APPLICATION DEVICE		sq ft / gal								
Micro 120 Roller		500 - 600								
T-Bar										
Stress										
										
1	2	3	4	5	6	7	8	9	10	
Living area						Commercial		Extreme		
Wood Cork										
 UL Classified in the UL Manufacturing System with UL Connected in 2018			 UL Classified in 2018			 Manufactured by CONNECTED SYSTEMS				






Rush

UV-curing 1-component water-based finish for hardwood flooring.

- Instant cure - no wait time
- Immediate 100% performance
- Commercial durability
- High solid formula
- Easy to use, no lap marks
- No foaming, very good leveling

ITEM-#	VARIANT			US REGULATORY VOC
LO-FI-129	satin	2.5 gal.	75	< 10 g/l




APPLICATION DEVICE		sq ft / 2.5 gal
Universal 100 Roller		1000 - 1250
T-Bar		
Mobile UV lamp		
Stress		
		
Living area Commercial Extreme		
 		



2K InvisibleProtect

New-generation surface protection for hardwood flooring and interior wood surfaces.

- Looks and feels like natural untreated wood
- Very easy to apply
- Self sealing – no primer needed
- Excellent chemical resistance
- Non-ambering, keeps the natural appearance of the wood
- Creates the look of natural penetrating oil when used with 2K Intensive

ITEM-#				US REGULATORY VOC
LO-FI-238	1 gal.	4	144	< 135 g/l

APPLICATION DEVICE	sq ft / gal
Micro 120 Roller	500 - 600
Deluxe 120 Roller	325 - 375

Stress






Wood | Cork



2K Supra A.T.

2-component ceramic-reinforced water-based polyurethane finish for hardwood flooring with extremely high resistance for the highest demands.

- Water-based polyurethane formula for extreme wear resistance
- Exceptional scratch resistance
- Excellent build through high solid content
- Non-yellowing
- Easy to use, no lap marks
- Floors are ready for full use after 12 hours.

ITEM-#	VARIANT				US REGULATORY VOC
LO-FI-157	satin	1 gal.	4	144	< 155 g/l
LO-FI-159	semi-gloss	1 gal.	4	144	< 155 g/l
LO-FI-100	gloss	1 gal.	4	144	< 178 g/l

APPLICATION DEVICE	sq ft / gal
Micro 120 Roller	500 - 600
T-Bar	

Stress





Wood | Cork



2K Duo

2-component water-based polyurethane finish for extremely heavy wear for hardwood and cork flooring.

- Water-based polyurethane formula for extreme wear resistance
- Excellent build through high solid content
- Easy to use, no lap marks
- Non-yellowing

ITEM-#	VARIANT				US REGULATORY VOC
LO-FI-332	extra-matte	1 gal.	4	144	< 80 g/l
LO-FI-330	satin	1 gal.	4	144	< 130 g/l
LO-FI-331	semi-gloss	1 gal.	4	144	< 140 g/l

APPLICATION DEVICE	sq ft / gal
Micro 120 Roller	500 - 600
T-Bar	

Stress



Wood | Cork




1) satin, semi-gloss



SlipResist

Additive to improve slip resistant properties.

- Certified slip resistance
- Will not attract dirt and debris
- Water-based technology, solvent-free
- Simple and safe application
- Maintains finish clarity



ITEM-#			
LO-FI-347	3 fl. oz.	15	5040



UV-Protect

Additive to minimize the darkening of light colored wood from the influence of sunlight.

- Maintains wood color for a long period
- Suitable for all LOBA finishes

ITEM-#			
LO-FI-052	3.4 fl. oz.	15	5040



Whitener

Additive for brightening wood surfaces.

- Creates a smooth brightening of the wood surface
- Intensifies the whitening effect of white colored surfaces
- Variable control of brightening intensity
- May be combined with all water-based sealers and finishes from LOBA
- Reduces the natural yellowing of the wood
- Provides individual design options
- Water-based technology, solvent-free
- Simple and safe application

ITEM-#			
LO-FI-294	2.7 fl. oz.	15	5040



Amberizer

Additive to achieve the traditional look of an aged oil modified polyurethane finish with water-based coatings.

- Adds the look of oil-based finish
- Great to touch up and repair old floors
- Convenient package and great color consistency

ITEM-#			
LO-FI-001	3 fl. oz.	15	5040



Argo

Additive to prolong the open time of LOBA finishes.

- Reduces the risk of lap marks
- Does not change features of the finish

ITEM-#			
LO-FI-003	6.5 fl. oz.	12	2880



2K Impactoil

Solvent-free, 2-component high-solid penetrating oil based on natural ingredients for hardwood flooring.

- 100% solids – solvent-free/ zero VOC
- Natural matte appearance
- Excellent water resistance, also suitable for bathrooms, kitchens, and other rooms exposed to high humidity
- Increased anti-slip class R10 according to DIN 51130
- Easy and ergonomic application
- Time-saving application in 1 day
- Very high coverage

ITEM-#	VARIANT			
LO-FI-058	Transparent	2.5 kg	4	300

APPLICATION DEVICE	sq ft / 2.5 kg
Micro 60 - 80 Roller	400 - 500




Wood



PreTone


Water-based pre-treatment coloring system for hardwood flooring.

- Allows an infinite amount of customization
- Intensifies light colors
- Reduces oil-specific amberizing
- Easy and safe application
- Solvent-free and odor-neutral
- Unlimited color combinations


ITEM-#	VARIANT			
LO-FI-2...	Various Colors	2.5 l	6	216

APPLICATION DEVICE	sq ft / 2.5 l
Wischwiesel	275 - 325


Wood




LO-FI-237
White



LO-FI-240
Black



LO-FI-241
Brown



LO-FI-266
Steel



LO-FI-267
Mocha

Illustration colors are non-binding



2K ImpactOil Color

Colored 2-component high-solid penetrating oil based on natural ingredients for hardwood flooring.

- 100% solids – solvent-free/ zero VOC
- Natural matte appearance
- Excellent water resistance, also suitable for bathrooms, kitchens, and other rooms exposed to high humidity
- Increased anti-slip class R10 according to DIN 51130
- Easy and ergonomic application
- Time-saving application in 1 day
- Very high coverage

APPLICATION DEVICE	sq ft / 0.75 kg
Trowel	150 - 250

Wood



ITEM-#	VARIANT			
LO-FI-...	Various Colors	750 g	4	624

All colors are also available in 100 ml sample cans.
10610-90 / SampleSet / 17 x 100ml + 5 x 100ml PreTone

Basic Colors	 LO-FI-084 Black	 LO-FI-026 White	 LO-FI-196 Grey				
Wood Colors	 LO-FI-080 Mahogany	 LO-FI-290 Walnut	 LO-FI-081 Smoked oak	 LO-FI-023 Kambala	 LO-FI-024 Sucupira	 LO-FI-025 Wenge	 LO-FI-191 Antique oak
Trend Colors	 LO-FI-079 Papyrus	 LO-FI-190 Chalk	 LO-FI-192 Oyster	 LO-FI-193 Clay	 LO-FI-194 Sand	 LO-FI-189 Pearl	 LO-FI-195 Silver

Illustration colors are non-binding



ParkettSoap R2U

ParkettSoap R2U is a ready to use cleaning solution for the deep cleaning of wood surfaces which are treated with oxidizing oils.

- Ready to use, no mixing required
- Removes grey and faded layers after exposure to sunlight
- Great for indoor and outdoor use
- Water-based yet powerful formula to remove residue and dirt

Wood

ITEM-#			
LO-MA-010	1 gal.	4	200



ParkettOil

Maintenance oil for non-layer-forming oil surfaces.

- Retains the matte finish of oiled floors
- No self-polishing
- Suitable as spot treatment
- Removes wear marks

Wood

ITEM-#			
LO-MA-007	1 qt.	6	600



NatureOil

Water-based maintenance oil for oiled hardwood flooring.

- Ready to use, solvent-free, and soap-free
- Reliably retains the matte finish of oiled hardwood floors
- Ideal for treating the whole floor or touching up smaller areas
- Simple application with cloth or sponge

Wood

ITEM-#			
LO-FI-115	1 qt.	15	540



Permanent OilCare

Film-forming maintenance oil for permanent protection, refreshing, and maintenance care of hard wax and UV oiled surfaces.

- Long-lasting refreshment for high traffic floors
- Helps to conceal fine scratches and wear
- Maintains the slip resistant properties of the floor
- Oxime and cobalt free
- Suitable for children's toys as per EN 71-3
- Safe drying

Wood | Cork

ITEM-#			
LO-FI-428	1 qt.	6	600



Remover

Low-foaming, deep cleaning concentrate for heavily soiled floors and to break down and remove layers of old floor care products.

- Strong cleaning ability
- Does not leave streaks or residues
- Breaks down most care and maintenance products
- pH-neutral water-based formula

Wood | Cork | Linoleum | PVC | Tile

ITEM-#			
LO-MA-009	1 qt.	12	840






FloorCare

Floor care product for finished flooring.

- Provides a protective layer
- Can be removed without sanding
- VOC compliant
- Excellent adhesion
- Easy to apply

Wood | Cork | Linoleum | PVC

ITEM-#	VARIANT			
LO-MA-003	semi-gloss	1 qt.	12	840
LO-MA-002	satin	1 qt.	12	840



InvisibleCare

Water-based film-forming care product with an “Invisible” sheen level.

- Preserves extra matt appearance
- Suitable for adjusting the gloss level from semi-gloss to extra-matte
- Easy application
- Helps to conceal fine scratches and wear
- Improves cleaning properties by reducing dirt adhesion

Wood | Cork | Linoleum | PVC

ITEM-#			
LO-FI-427	1 qt.	12	840



Spray Mop Set

Mop with integrated spray function.

- Quick and easy cleaning without a cleaning bucket
- Damp mopping - ideal for wooden floors and hard surface floor coverings
- Includes microfiber mop pad and 8.45 fl. oz. refill cleaning concentrate

ITEM-#		
LO-MA-037	12	192



Mop

Mop for application of LOBA cleaning and care products.

- Easy application
- Including high-quality microfiber mop pad (washable up to 140° F without fabric softener)


ITEM-#		
LO-MA-045	24	576



Spray Mop Refill

High-yield cleaning concentrate for refilling the LOBA Spray Mop.

- Use to refill the LOBA Spray Mop container - 4 refills per bottle
- Fast drying without streaks
- pH-neutral, free of solvents and plasticizers


ITEM-#			
LO-MA-046	8.45 fl. oz.	45	2604



Mop Pad

Replacement cover for LOBA Spray Mop and Mop.

- High quality microfiber mop pad (washable up to 140° F without fabric softener)
- Suitable for LOBA Spray Mop and LOBA Mop

ITEM-#		
LO-MA-020	100	2900



Universal Floor Cleaner Spray

Ready-to-use spray cleaner for all water-resistant surfaces, pH-neutral.

All water-resistant flooring

- Ready-to-use spray
- Fast drying without streaks
- pH-neutral, free of solvents and plasticizers

ITEM-#			
LO-MA-043	16. fl. oz.	12	1224

[View Product Page](#) [View Product Page](#)



Universal Floor Cleaner Concentrate

Universal cleaning concentrate for all water-resistant surfaces, pH-neutral.

All water-resistant flooring

- Ideally suited for intensive and maintenance cleaning
- Fast drying without streaks
- pH-neutral, free of solvents, and plasticizers


ITEM-#			
LO-MA-042	16. fl. oz.	12	1224

[View Product Page](#) [View Product Page](#)



Repair Set & Repair Set Refill



The solution for all smaller repairs of solid hardwood, engineered hardwood, laminate, and cork flooring. Colors are mixable. Includes wedge scraper, hot knife, and abrasive fabric. Repair Set Refill comes with 20 color hard wax filler sticks to refill your LOBA Repair Set.

ITEM-#	VARIANT	DESCRIPTION		
LO-FI-293	Various Colors	Repair Set	20	960
LO-FI-295	Various Colors	Repair Refill Set	20	960



Gap Filler

Acrylic-based. Silicone free. Sandable and coatable. Suitable for use on solid hardwood, engineered hardwood, laminate, vinyl, linoleum, cork, rubber, and other hard surface floor coverings.

ITEM-#	VARIANT		
LO-FI-3...	Various Colors	10.5 fl. oz.	12



LO-FI-339
Maple



LO-FI-340
Beech



LO-FI-341
Oak



LO-FI-342
Walnut



LO-FI-343
Mahogany



LO-FI-344
White



LO-FI-345
Silver



LO-FI-346
Grey






LO-FI-384
Oak Light


Illustration colors are non-binding



DeckOil
Penetrating oil for wood surfaces in outdoor areas.

- Deep protection against UV radiation, frost, and moisture
- Good penetration behavior, effective deep protection
- Simple and safe application
- Also suitable for protecting outdoor furniture
- Applicable on smooth and textured planks
- Certified anti-slip properties as per DIN 51130 for work areas
- Suitable for children’s toys as per EN 71-3




ITEM-#	VARIANT			
LO-FI-298	Transparent	2.5l	4	120


APPLICATION DEVICE	sq ft / 2.5 l
Oil brush	105 - 270
Wood	
	



DeckOil Color
Colored penetrating oil for wood surfaces in outdoor areas.

- Deep protection against UV radiation, frost, and moisture
- Good penetration behavior
- Easy and safe application
- Also suitable for protecting outdoor furniture
- Applicable on smooth and textured planks
- Certified anti-slip properties as per DIN 51130 for work areas
- Suitable for children’s toys as per EN 71-3

ITEM-#	VARIANT			
LO-FI-...	Various Colors	2.5l	4	120


APPLICATION DEVICE	sq ft / 2.5 l
Oil brush	105 - 270
Wood	
	




LO-FI-299
Red Brown



LO-FI-300
Light Brown



LO-FI-301
Dark Brown



LO-FI-302
Grey

Illustration colors are non-binding



DeckDegrayer

Special cleaner for wooden surfaces in outdoor areas.

- Ideal degreasing preparation prior to surface treatment
- Easy and safe application
- Can be used on horizontal and vertical surfaces
- Approved for outdoor furniture
- No sanding necessary
- Applicable for all wood species

Wood

ITEM-#			
LO-FI-306	2.5l	6	144



DeckCleaner

Maintenance cleaner for outdoor areas.

- Can be used on horizontal and vertical surfaces
- Approved for outdoor furniture
- Easy to use
- Suitable for oiled or finished wood and WPC

Wood | WPC

ITEM-#			
LO-FI-305	2.5l	6	144




WPC Refresh

Maintenance oil for outdoor areas.

- Optical upgrading for WPC and oiled wood surfaces
- Brings back the silky matte look
- Easy and safe application
- Suitable for WPC and oiled wood surfaces

Wood | WPC

ITEM-#			
LO-FI-307	1 qt.	6	672



Premium | Ceramic

For the most beautiful sanding pattern and the best tool life

- Achieves the best sanding pattern
- Very long service life
- Extreme heat resistance
- Best price-performance ratio on the market, as it is very resilient
- Suitable for all surface treatments
- For sanding UV-coated floors

			Dimensions	Grain size: coarse to fine							
Belt		10	8"	24	36	40	50	60	80	100	120
Hook & Loop disc		50	ø 6"	24	36	40		60	80	100	120
		50	ø 7"	24	36	40	50	60	80	100	120
		50	ø 8"					60	80	100	120
Hook & Loop disc Center hole		50	ø 7"	24	36	40	50	60	80	100	120



Dynamic | Zirconia

For fast results and high abrasion

- Fast removal
- Highly aggressive
- Clogs less because of half-open spreading
- Good heat resistance
- 100% zirconia, unique selling proposition on the market

			Dimensions	Grain size: coarse to fine							
Belt		10	8"	24	36	40	50	60	80	100	120
Hook & Loop disc		50	ø 5"					60	80	100	120
		50	ø 6"	24	36	40		60	80	100	120
		50	ø 7"	24	36	40	50	60	80	100	120
		50	ø 8"					60	80	100	120
Hook & Loop disc Center hole		50	ø 7"	24	36	40	50	60	80	100	120



Classic | Aluminium Oxide

For price-conscious projects

- Leaves behind fewer visible scratches
- Low-cost price per unit
- Good for preparation for subsequent impregnation or coloring

			Dimensions	Grain size: coarse to fine								
Belt		10	8"	16	24	36	40	50	60	80	100	120
Hook & Loop disc		50	ø 6"		24	36	40		60	80	100	120
		50	ø 7"	16	24	36	40	50	60	80	100	120
		50	ø 8"						60	80	100	120
Hook & Loop disc Center hole		50	ø 7"	16	24	36	40	50	60	80	100	120

Other abrasives and pads

			Dimensions Grit	Recommended use
SpecialPad beige		10	ø 16"	Leveling
HandPadSet beige +25 pads		1	3.5" x 5"	Leveling
SpecialPad green		10	ø 16"	Thorough cleaning
NormalPad white		10	ø 16"	Stain application
DustPad		5	ø 16"	Dust reduction
PerforatedPad		25	ø 5" 80/100/120/150/180/220	Final and intermediate sanding
		10	ø 16" 80/100/120/150/180/220	Final and intermediate sanding



Oil brush

Applicator for certain LOBA products for outdoor areas.

ITEM-#	DIMENSIONS	
LO-MA-032	8"	1



Trowel

Applicator for filler products, oils, waxes, coloring systems, and primers.

ITEM-#	DESCRIPTION	DIMENSIONS	
LO-FI-059 / LO-FI-051	Stainless steel	10.5"/13.75"	6



Wischwiesel

Applicator with pad for water-based LOBA maintenance products. The LOBA applicator pad is a high-quality applicator head for the LOBA Wischwiesel.

ITEM-#	DESCRIPTION	DIMENSIONS	
LO-FI-055	Applicator	4.5 ft	20
LO-MA-007	Applicator pad	17"	100



Coating bucket, bucket liner

Bucket with lid and measuring scale. PE liners for the coating bucket.

ITEM-#	DESCRIPTION	
LO-FI-005	Bucket filling quantity 4.75 gal	1
LO-FI-268	Bucket liner	25



Wiping cloth

Ideally suited to wipe up excess material after oil application. Highly absorbent cloth with long lifetime. The product can also be used for cleaning tools and machines.

ITEM-#	
LO-MA-013	1000



Canister opener

Convenient tool for opening LOBA canisters. Especially helpful for opened canisters.

ITEM-#	
LO-MI-014	1



Spray can


Simple application of cleaning and maintenance products.

ITEM-#	DESCRIPTION	
LO-MA-034	Filling quantity 1l	1



Roller frame, roller extension pole

Roller frame: for finish rollers.
Telescopic bar: roller extension. Can be extended up to 8 ft.

ITEM-#	DESCRIPTION	
LO-FI-077	Roller frame for 10" roller	20
LO-FI-017	Roller frame for 4" edge roller	20
LO-FI-127	Telescopic bar expandable 4 - 6.5 ft	10



Deluxe 120 Roller

Ensures the recommended quantity (approx. 375-400 sq.ft. / gal). No roller frame included.

ITEM-#	DESCRIPTION	
LO-FI-116	10" roller	12



Universal 100 Roller

For LOBA Rush Application quantity approx. 400-500 sq.ft. / gal. No roller frame included.

ITEM-#	DESCRIPTION	
LO-FI-126	10" roller	12



Micro 120 Roller

For all LOBA water-based finishes. Application quantity between 400-600 sq.ft. / gal. No roller frame included.

ITEM-#	DESCRIPTION	
LO-FI-031	10" roller	12



Micro 60-80 Roller

For the roller application of oils (LOBA oils and 2K Intensive). Application quantity between 400-540 sq. ft. / 2.5 kg. No roller frame included.

ITEM-#	DESCRIPTION	
LO-FI-032	10" roller	12



Rollerbox

Clean storage of rollers.

ITEM-#	DIMENSIONS	
LO-FI-033	10"	50



Edge Roller

Roller for edges and other hard-to-reach areas.

ITEM-#	DESCRIPTION	
LO-FI-016	4" roller	10

List of Wood Species for Sealers & Finish Systems

1. Domestic Wood Species

Wood Species	2K Intensive	EasyPrime	AmberPrime
Acacia / Yellow Locust	+	◇	◇
Acacia / Yellow Locust steamed	+	◇	◇
Alder	+	+	+
Ash	+	+	+
Beech natural	+	+	+
Beech steamed	◇	+	◇
Birch	+	+	+
Cherry (North American/European)	+	+	◇
Chestnut tree	+	+	+
Elm	+	+	◇
Larch	+	◇	◇
Maple (North American/European)	+	+	+
Olive tree	+	+	◇
Pear tree	◇	–	–
Pine	+	+	+
Red Oak	+	+	+
Smoked Oak	+	+	◇
Spruce	+	+	+
Walnut (North American/European)	+	+	◇
White Oak	+	+	+

2K Invisible Protect	Life [®]	Hybrid [®]
◇	◇	◇
◇	◇	+
+	+	+
+	+	+
+	+	+
◇	◇	+
+	+	+
◇	◇	+
+	+	◇
◇	◇	+
◇	◇	+
+	+	+
◇	◇	-
-	-	-
+	+	+
+	+	+
◇	◇	-
+	+	+
◇	◇	-
+	+	+

2. Exotic Wood Species

Common Name	1	2	3
Afromosia / Kokrodua	+	+	◇
Arrurra Vermelho	+	-	-
Bamboo	-	+	+
Basralocus wood	+	+	◇
Cabreuva	+	+	◇
Camwood	+	+	
Coconut	+	+	◇
Coigue steamed	+	+	
Cumaru / Almendrillo	+	+	◇
Curupau	+	+	◇
Cypress	+	+	◇
Doussie / Afzelia	+	+	◇
Ebony / Makassar	-	+	◇
Eucalyptus / Jarrah	+	+	◇
Eucalyptus / Spottet Gum	+	+	◇
Guatambu	+	+	◇
Hard Pine (new floors)	+	+	◇
Incienso Colorado	+	+	◇
Ipe / Lapacho / Guaycan	◇	◇	◇
Iroko / Kambala	-	-	-
Iron Wood	+	+	◇
Jatoba / Brazilian Cherry	+	+	◇
Kempas	-	◇	◇
Kotibe / Mahogany	+	+	◇
Mahogany	+	+	◇
Massaranduba	+	+	◇
Mecrusse	+	+	◇
Moluccan Ironwood	+	◇	◇
Muhuhu	+	-	-
Mutenye	+	+	◇
Opepe	+	+	◇
Partridge Wood	+	+	◇
Pigua Marfin	+	-	-
Pitch Pine (old floors)	+	+	◇
Purpleheart	+	-	-
Rosewood	-	+	◇
Rubberwood	+	+	◇
Sucupira	+	+	◇
Tasmanien Oak	+	+	+
Tauari	+	+	+
Teak	+	+	◇
Tigerwood	+	+	◇
Wenge	+	+	◇
Yvyraro	+	+	◇

◇	◇	+
-	-	+
+	-	-
◇	◇	◇
◇	◇	◇
◇	◇	◇
◇	◇	-
◇	◇	+
◇	◇	+
◇	◇	+
◇	◇	+
◇	◇	+
◇	◇	+
◇	◇	+
◇	◇	+
◇	◇	+
◇	◇	◇
◇	◇	◇
-	-	-
◇	◇	+
◇	◇	+
◇	◇	◇
◇	◇	+
◇	◇	+
◇	◇	+
◇	◇	+
◇	◇	+
◇	-	◇
-	◇	-
◇	◇	+
◇	◇	-
◇	◇	+
◇	+	+
◇	-	+
-	◇	-
◇	+	+
+	◇	-
◇	+	+
◇	◇	◇
◇	◇	+
◇	◇	+
◇	◇	+
◇	◇	+
◇	◇	+

+ = Without limitation applicable

◇ = Application can cause problems. Consult LOBA prior to use

- ✓ = Application can cause problems
- = Use is not recommended

- * Can be used as a stand-alone system

List of Wood Species for Oil Systems

1. Domestic Wood Species

Wood Species	2K ImpactOil
Acacia / Yellow Locust	+
Acacia / Yellow Locust steamed	+
Alder	+
Ash	+
Beech natural	+
Beech steamed	+
Birch	+
Black cherry	+
Cherry (North American/European)	+
Chestnut tree	+
Elm	+
Larch	+
Maple (North American/European)	+
Olive tree	+
Pear tree	◇
Pine	+
Red Oak	+
Smoked oak	+
Spruce	+
Walnut (North American/European)	+
White Oak	+

+ = Without limitation applicable

◇ = Application can cause problems. Consult LOBA prior to use

- = Use is not recommended

2. Exotic Wood Species

Wood Species	2K ImpactOil
Afromosia / Kokrodua	+
Arrurra Vermelho	+
Cabreuva	+
Camwood	+
Coconut	+
Cumarú / Almendrillo	+
Cypress	◇
Doussie / Afzelia	+
Eucalyptus / Jarrah	+
Eucalyptus / Spotted Gum	+
Guatambu	+
Hard Pine (new floors)	+
Ipe / Lapacho / Guaycan	◇
Iroko / Kambala	+
Iron Wood	+
Jatoba / Brazilian Cherry	+
Kotibe / Mahogany	+
Mahogany	+
Mahogany Acajou	+
Massaranduba	+
Mecrusse	+
Moluccan Ironwood	+
Muhuhu	+
Opepe	+
Partridge Wood	+
Piguia Marfin	+
Pitch Pine (old floors)	+
Purpleheart	+
Rubberwood	+
Sucupira	+
Tasmanian Oak	+
Teak	+
Wenge	+

Range of Use – Rollers



	Micro 60-80	Micro 120	Universal 100	Deluxe 120
EasyPrime	–	✓	–	–
AmberPrime	–	✓	–	–
2K Intensive	✓	–	–	–
EasyFinish	–	✓	–	✓
Viva	–	✓	–	✓
Life	–	✓	–	✓
2K InvisibleProtect	–	–*	–	✓
2K Supra A.T.	–	✓	–	✓
2K Duo	–	✓	–	✓
Hybrid	–	✓	–	✓
Rush	–	–	✓	–
2K ImpactOil transparent	✓	–	–	–

✓ = Without limitation applicable

– = Use not recommended

* = Please refer to the Technical Information

Our stress levels at a glance

The new stress levels defined by LOBA help you find the perfect finish for the types of stress your project will be exposed to.

Our teams in the Application Technology and Research & Development departments continuously test LOBA products in order to ensure consistent quality and develop our products further on the basis of new requirements defined by our customers as well as laws and regulations. The tests are extremely comprehensive and examine numerous properties.

Four test categories were chosen that most strongly represent the overall resistance of the finishes:

- Single scratch
- Abrasion
- Wear
- Chemical resistance

1K and 2K finishes are evaluated on the basis of laboratory values in the respective categories on a scale of 1 – 10, and a mean value is also calculated from this.

	2K Duo
Single scratch	9
Abrasion	10
Wear	9
Chemical resistance	9
Mean value	9.3 -> 9

Calculation example using 2K Duo



As shown on the product



Explanation of symbols



EMI CODE® EC1 PLUS and EC1R PLUS:
Very low emissions



Suitable for children's toys according to DIN EN 71-3



Connected Systems: System guarantee for LOBA sealing products and oils for Wakol adhesive and levelling compounds



Non-slip according to DIN 51097 evaluation group A



EMICODE® EC1 and EC1R:
Very low emissions



Emissions-tested construction product, Class M1



Emission-tested construction product according to French VOC regulation



Non-slip according to DIN 51097 evaluation group B



EMICODE® EC2 and EC2R:
Low emissions



Emissions-tested Construction product compliant with DIBt principles



Non-slip according to DIN 51130 evaluation group R9



Eco-friendly and low-VOC product



Non-slip according to DIN 51130 evaluation group R10



Non-slip according to DIN 51130 evaluation group R11




Container size



Pallet unit



Packaging unit

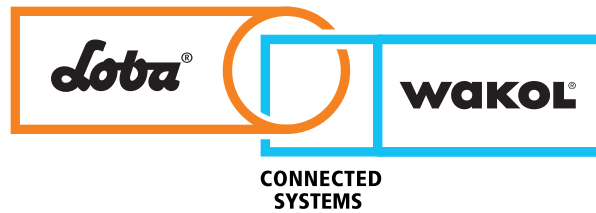

Connected Systems

perfect results
for your projects

Your benefits with LOBA and Wakol Connected Systems:

- Outstanding compatible products
- Powerful security for your installation
- No chemical reaction between finish and adhesive
- No softening of the finish, prevents dark joints
- Successful application guaranteed in a well proven system

We care about your success!



LOBA	1K FINISH	EasyFinish			✓	✓	✓	✓	✓
		Viva	✓	✓	✓	✓	✓	✓	✓
		Life	✓	✓	✓	✓	✓	✓	✓
		Hybrid			✓	✓	✓	✓	✓
		Rush			✓	✓	✓	✓	✓
	2K FINISH	2K InvisibleProtect	✓	✓	✓	✓	✓	✓	✓
		2K Supra AT	✓	✓	✓	✓	✓	✓	✓
		2K Duo	✓	✓	✓	✓	✓	✓	✓
	OIL	2K ImpactOil	✓	✓	✓	✓	✓	✓	✓
		2K ImpactOil Color	✓	✓	✓	✓	✓	✓	✓




Status December 2025 | Subject to change | Updates can be found at www.loba-usa.com and www.wakol-usa.com. Professional use of the listed Connected Systems products is a key factor for successful results. Please take note of the respective technical data sheets of the products used.



2025 Training Dates



2025 EDUCATION SEMINAR SCHEDULE

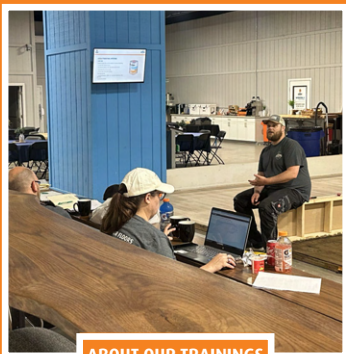

ABOUT OUR TRAININGS

Loba-Wakol provides top-notch technical training opportunities. Technical Training Seminars provide classroom and hands-on training where attendees work directly with LOBA and WAKOL high-performance products, as well learn the evaluation of subfloor and flooring, proper substrate preparation and the newest installation techniques for wood as well as for resilient flooring.

You will return to your jobsite with the latest knowledge and skills necessary to increase job efficiency and maximize profits for your company in order to safeguard your success in this competitive world.

FOR MORE INFORMATION & THE MOST RECENT UPDATES ABOUT OUR 2025 EDUCATION SEMINAR SCHEDULE VISIT OUR WEBSITE HERE



800.230.6456 | www.loba-wakol.com



LOBA SAND & STAIN:

This is an intensive course where all students will actively use multiple types of sanding equipment to help understand sanding sequences, differences in sand-paper minerals, how to apply stain and perform touch-ups, and application of sealers. Bring your work clothes. (3-day course)

Feb. 18-20, 2025 (Wadesboro, NC) | Oct. 7-9, 2025 (Wadesboro, NC)



LOBA WAKOL NORTH AMERICA & LAGLER:

This course provides the fundamentals of subfloor prep, Wakol moisture mitigation and adhesive application, equipment operation, Lägler PST sanding techniques, and an understanding of LOBA water-based finish systems and application. (3-day course)

Jan. 7-9, 2025 (Minnesota) | Feb. 25-27, 2025 (Wadesboro, NC) | Jun. 3-5, 2025 (Wadesboro, NC)



LOBA WAKOL NORTH AMERICA CONNECTED SYSTEMS:

This comprehensive hands-on course offers a "systems approach" education with WAKOL prep and installation solutions followed by LOBA sanding, coloring, and finishing systems. (3-day course)

Mar. 11-13, 2025 (Portuguese Only - Wadesboro, NC) | May 13-15 (Wadesboro, NC) | Sep. 23-25, 2025 (Wadesboro, NC)



WAKOL SUBSTRATE PREP, UNDERLAYMENT & RESILIENT INSTALL:

In partnership NAFCT, WAKOL offers this two-part certification training. Part 1 is Substrate Preparation training and certification testing (with NAFCT membership), and Part 2 is Modular Resilient Installation and certification testing (with NAFCT membership). For NAFCT membership go to www.nafct.com. (3-day course)

Feb. 4-6, 2025 (Wadesboro, NC) | Oct. 21-23, 2025 (Wadesboro, NC)



LOBA WAKOL NORTH AMERICA ESSENTIALS REGIONAL TRAINING:

This "essentials" course is designed to give you an introductory knowledge of both LOBA and WAKOL systems that you can easily implement into your projects. This course will help build a foundation for more "in-depth" trainings at LOBA-Wakol headquarters. (2-day course)

Contact Your Local Rep For Dates Near You



Loba Wakol LLC
2732 Hwy 74 West
Wadesboro, NC 28170
Phone: (800) 230-6456
Email: info@loba-wakol.com
www.loba-wakol.com

LOBA WAKOL North America
is member of



LOBA GmbH & Co. KG is ISO-certified

